

SI-8000FD Series**Surface Mount, Separate Excitation Step-down Switching Mode****■Features**

- Surface-mount package (TO263-5)
- Output current: 3.5 A
- High efficiency: 83% ($V_o = 5 V$, $V_{IN} = 15 V$, $I_o = 2 A$)
- Requires only 6 discrete components
- Built-in reference oscillator (300 kHz)
- Built-in drooping-type overcurrent and thermal protection circuits
- Built-in soft start circuit (Output ON/OFF available)
 - SI-8001FDE
- Built-in on/off function (active Low)
 - SI-8001FDL
- Low current consumption during off
 - SI-8001FDL

■Applications

- DVD recorder, FPD-TV
- OA equipment, such as printers
- Onboard local power supplies

■Recommended Operating Conditions

Parameter	Symbol	Ratings			Unit
		SI-8001FDE	SI-8050FDL		
Input Voltage Range	V_{IN}		$V_o + 3^1$ to 40		V
Output Voltage Range	V_o		0.8 to 24		V
Output Current Range	I_o		0 to 3.5		A
Operating Junction Temperature Range	T_{jop}		-30 to +100		°C
Operating Temperature Range	T_{op}		-30 to +85		°C

*1: The minimum value of the input voltage range is 4.5 V or $V_o + 3 V$, whichever is higher.


■Electrical Characteristics

($R_1=4.2\text{k}\Omega$, $R_2=0.8\text{k}\Omega$ when $T_a = 25^\circ\text{C}$ and $V_o=5\text{V}$)

Parameter	Symbol	Ratings						Unit
		SI-8001FDE			SI-8001FDL			
min.	typ.	max.	min.	typ.	max.			
Reference Voltage	V_{ADJ}	0.784	0.800	0.816	0.784	0.800	0.816	V
	Conditions	$V_{IN}=15\text{V}$, $I_o=0.2\text{A}$			$V_{IN}=15\text{V}$, $I_o=0.2\text{A}$			
Temperature Coefficient of Reference Voltage	$\Delta V_{ADJ}/\Delta T$		±0.1			±0.1		mV/°C
	Conditions	$V_{IN}=15\text{V}$, $I_o=0.2\text{A}$, $T_c=0$ to 100°C			$V_{IN}=15\text{V}$, $I_o=0.2\text{A}$, $T_c=0$ to 100°C			
Efficiency	η		83			83		%
	Conditions	$V_{IN}=15\text{V}$, $I_o=2\text{A}$			$V_{IN}=15\text{V}$, $I_o=2\text{A}$			
Oscillation Frequency	f_o	270	300	330	270	300	330	kHz
	Conditions	$V_{IN}=15\text{V}$, $I_o=2\text{A}$			$V_{IN}=15\text{V}$, $I_o=2\text{A}$			
Line Regulation	ΔV_{OLINE}			80			80	mV
	Conditions	$V_{IN}=10$ to 30V , $I_o=2\text{A}$			$V_{IN}=10$ to 30V , $I_o=2\text{A}$			
Load Regulation	ΔV_{LOAD}			50			50	mV
	Conditions	$V_{IN}=15\text{V}$, $I_o=0.2$ to 3.5A			$V_{IN}=15\text{V}$, $I_o=0.2$ to 3.5A			
Overcurrent Protection Starting Current	I_s	3.6			3.6			A
	Conditions	$V_{IN}=15\text{V}$			$V_{IN}=15\text{V}$			
SS Pin ¹	Low Level Voltage	V_{SSL}		0.5	—	—	—	V
	Outflow Current at Low Voltage	I_{SSL}	6	30	—	—	—	
ON/OFF Pin ²	ON/OFF Control Voltage (Output on)	V_c, I_H	—	—	—	—	0.8	V
	ON/OFF Control Voltage (Output off)	V_c, I_L	—	—	2.0	—	—	
Quiescent Circuit Current	I_c, I_H	—	—	—	6	100	—	μA
	Conditions	$V_{IN}=15\text{V}$, $V_{ss}=0\text{V}$			$V_c=2\text{V}$			
	I_q	6			6			mA
	Conditions	$V_{IN}=15\text{V}$, $I_o=0\text{A}$			$V_{IN}=15\text{V}$, $I_o=0\text{A}$			
	$I_{q(OFF)}$	200	600		30	200		μA
	Conditions	$V_{IN}=15\text{V}$, $V_{ss}=0\text{V}$			$V_{IN}=15\text{V}$, $V_c=2\text{V}$			


*1: Pin 5 is the SS pin. Soft start at power on can be performed with a capacitor connected to this pin. The output can also be turned ON/OFF with this pin. The output is stopped by setting the voltage of this pin to V_{SSL} or lower. SS-pin voltage can be changed with an open-collector drive circuit of a transistor. When using both the soft-start and ON/OFF functions together, the discharge current from C3 flows into the ON/OFF control transistor. Therefore, limit the current securely to protect the transistor if C3 capacitance is large. The SS pin is pulled up (3.7 V typ.) to the power supply in the IC, so applying the external voltage is prohibited. If this pin is not used, leave it open.

*2: Output is OFF when the output control terminal V_c is open. Each input level is equivalent to LS-TTL. Therefore, the device can be driven directly by LS-TTLs.

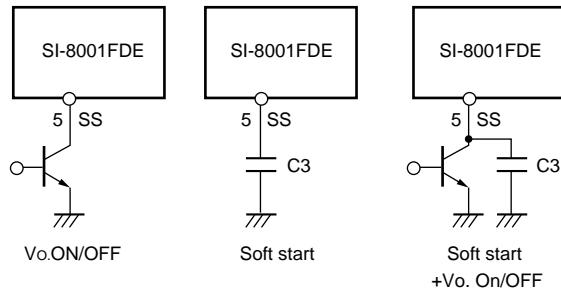


■External Dimensions (TO263-5)

(Unit : mm)

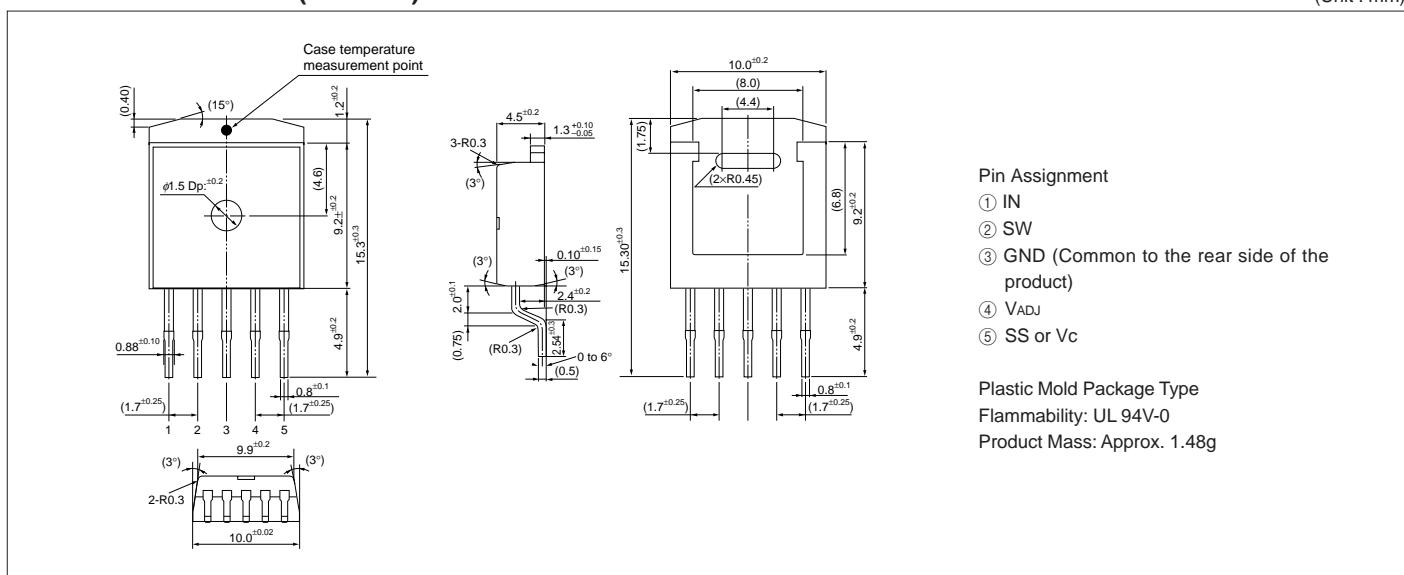

■Block Diagram

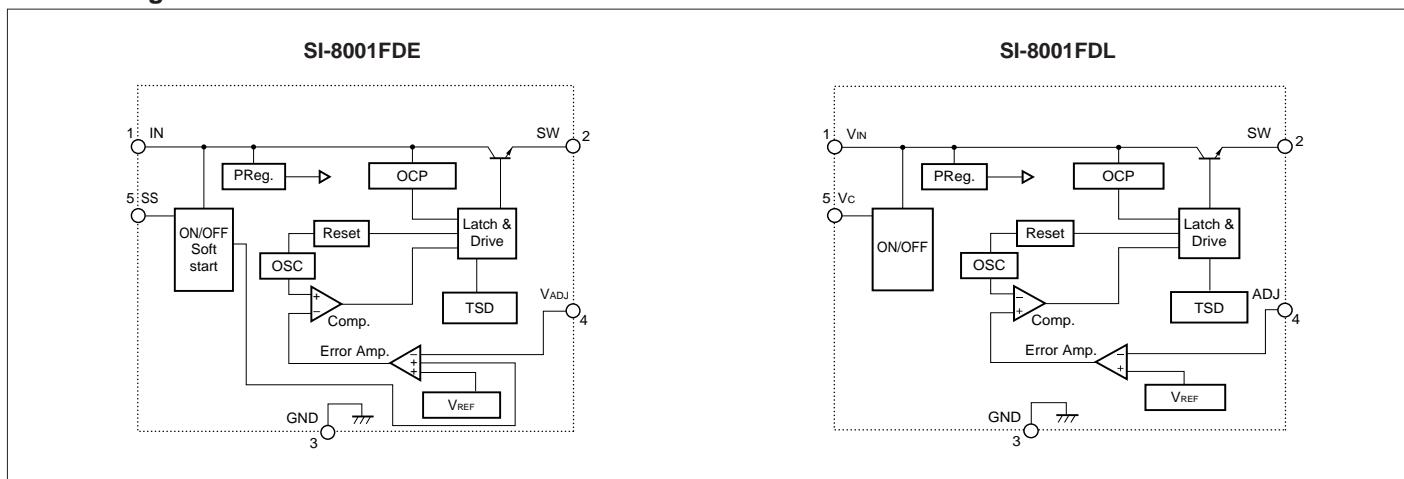

■Typical Connection Diagram

