



AOT474/AOTF474

75V N-Channel MOSFET




General Description

The AOT474 and AOTF474 use a robust technology that is designed to provide efficient and reliable power conversion even in the most demanding applications, including motor control. With low $R_{DS(ON)}$ and excellent thermal capability this device is appropriate for high current switching and can endure adverse operating conditions.

Product Summary

V_{DS}	75V
I_D (TO220 at $V_{GS}=10V$)	127A
I_D (TO220FL at $V_{GS}=10V$)	47A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	< 11.3mΩ

100% UIS Tested
100% Rg Tested

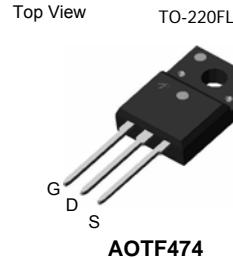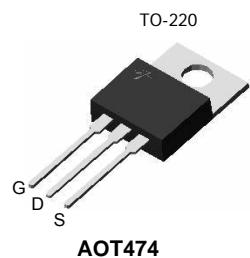

Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	AOT474	AOTF474	Units
Drain-Source Voltage	V_{DS}	75		V
Gate-Source Voltage	V_{GS}	± 20		V
Continuous Drain Current	I_D	127	47	A
$T_C=100^\circ C$		89	33	
Pulsed Drain Current ^C	I_{DM}	240		
Continuous Drain Current	I_{DSM}	9	9	A
$T_A=70^\circ C$		7	7	
Avalanche Current ^C	I_{AS}, I_{AR}	106		A
Avalanche energy L=0.1mH ^C	E_{AS}, E_{AR}	562		mJ
Power Dissipation ^B	P_D	417	57.5	W
$T_C=100^\circ C$		208	29	
Power Dissipation ^A	P_{DSM}	1.9	1.9	W
$T_A=70^\circ C$		1.2	1.2	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 175		°C

Thermal Characteristics

Parameter	Symbol	AOT474	AOTF474	Units
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	13.9	13.9	°C/W
Maximum Junction-to-Ambient ^{A,D} Steady-State		65	65	°C/W
Maximum Junction-to-Case	$R_{\theta JC}$	0.36	2.6	°C/W

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	75			V
$I_{\text{DS}(\text{SS})}$	Zero Gate Voltage Drain Current	$V_{DS}=75\text{V}, V_{GS}=0\text{V}$ $T_J=55^\circ\text{C}$			1 5	μA
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm 20\text{V}$			100	nA
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	2.6	3.4	4	V
$I_{D(\text{ON})}$	On state drain current	$V_{GS}=10\text{V}, V_{DS}=5\text{V}$	240			A
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=30\text{A}$ $T_J=125^\circ\text{C}$		9.4 18	11.3 21.5	$\text{m}\Omega$
g_{FS}	Forward Transconductance	$V_{DS}=5\text{V}, I_D=30\text{A}$		67		S
V_{SD}	Diode Forward Voltage	$I_S=1\text{A}, V_{GS}=0\text{V}$		0.73	1	V
I_S	Maximum Body-Diode Continuous Current				128	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=30\text{V}, f=1\text{MHz}$	2240	2805	3370	pF
C_{oss}	Output Capacitance		355	507	660	pF
C_{rss}	Reverse Transfer Capacitance		22	36	50	pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	1.4	2.8	4.2	Ω
SWITCHING PARAMETERS						
$Q_g(10\text{V})$	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=30\text{V}, I_D=30\text{A}$	39	49.6	60	nC
Q_{gs}	Gate Source Charge		11	13.8	17	nC
Q_{gd}	Gate Drain Charge		8	14	20	nC
$t_{D(\text{on})}$	Turn-On DelayTime	$V_{GS}=10\text{V}, V_{DS}=30\text{V}, R_L=1\Omega, R_{\text{GEN}}=3\Omega$		15		ns
t_r	Turn-On Rise Time			34		ns
$t_{D(\text{off})}$	Turn-Off DelayTime			42		ns
t_f	Turn-Off Fall Time			4.5		ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=30\text{A}, dI/dt=500\text{A}/\mu\text{s}$	35	50	65	ns
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=30\text{A}, dI/dt=500\text{A}/\mu\text{s}$	330	472	614	nC

A. The value of R_{JJA} is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The Power dissipation P_{DSM} is based on R_{JJA} and the maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design, and the maximum temperature of 175°C may be used if the PCB allows it.

B. The power dissipation P_D is based on $T_{J(\text{MAX})}=175^\circ\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=175^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.

D. The R_{JJA} is the sum of the thermal impedance from junction to case R_{JJC} and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300 μs pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(\text{MAX})}=175^\circ\text{C}$. The SOA curve provides a single pulse rating.

G. These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$.

Rev 0:February 2009

COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

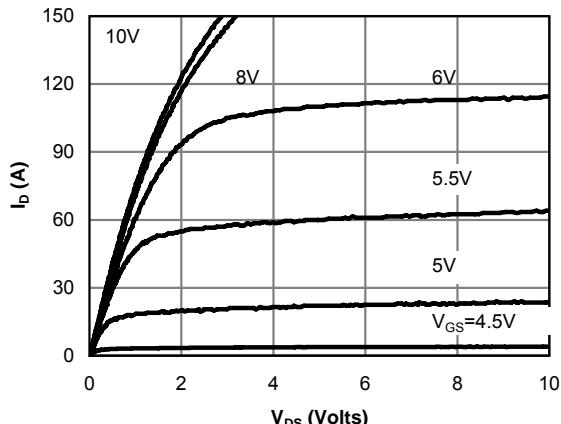
TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Fig 1: On-Region Characteristics (Note E)

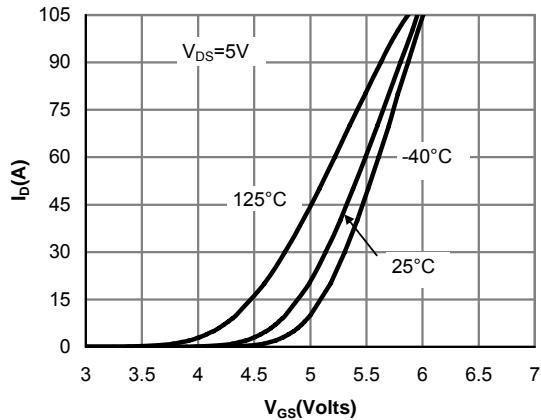


Figure 2: Transfer Characteristics (Note E)

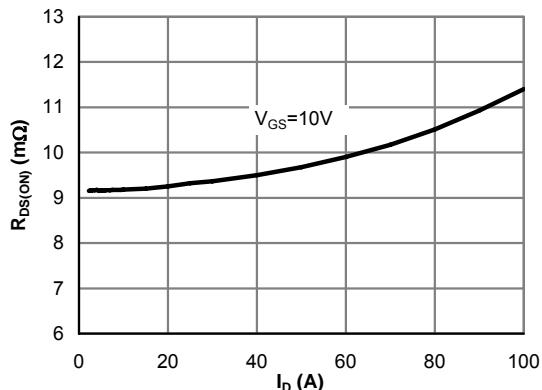


Figure 3: On-Resistance vs. Drain Current and Gate Voltage (Note E)

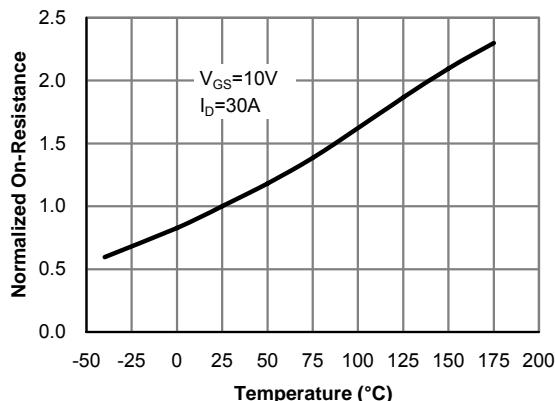


Figure 4: On-Resistance vs. Junction Temperature (Note E)

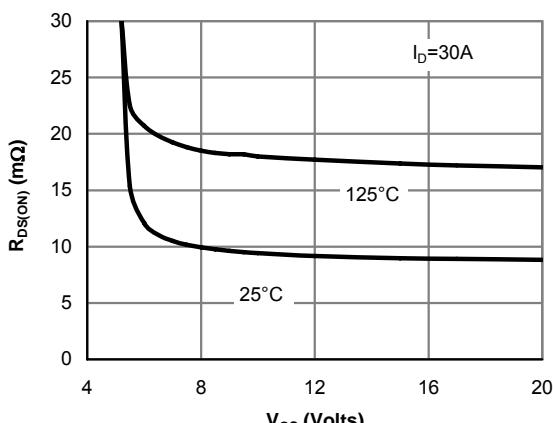


Figure 5: On-Resistance vs. Gate-Source Voltage (Note E)

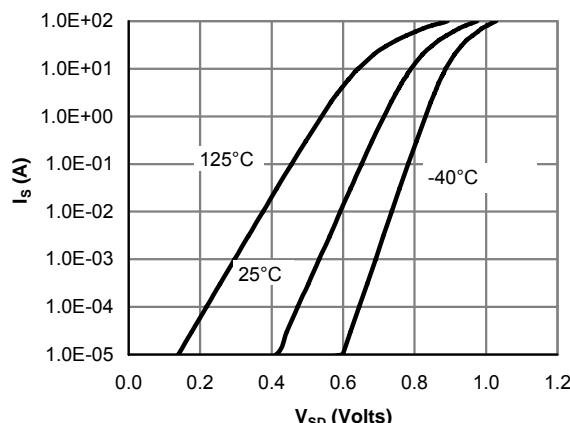
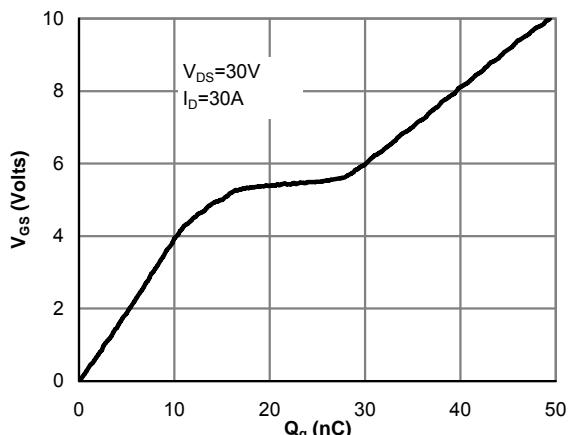
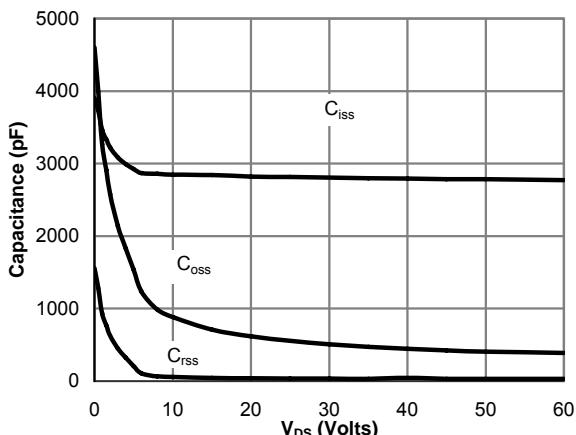
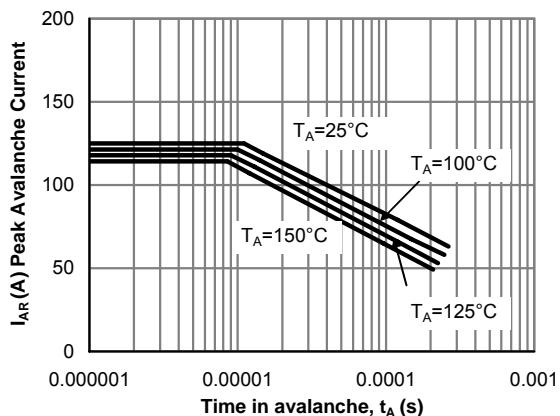


Figure 6: Body-Diode Characteristics (Note E)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics

Figure 9: Single Pulse Avalanche capability (Note C)

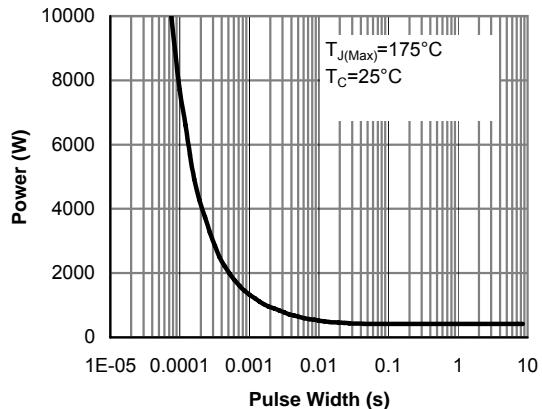
TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Figure 10: Single Pulse Power Rating Junction-to-Case for AOT474 (Note F)

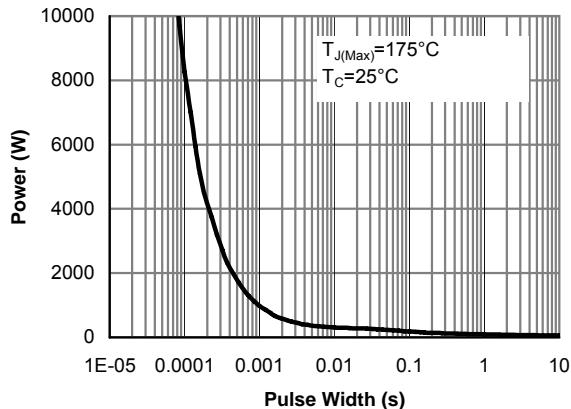


Figure 11: Single Pulse Power Rating Junction-to-Case for AOTF474 (Note F)

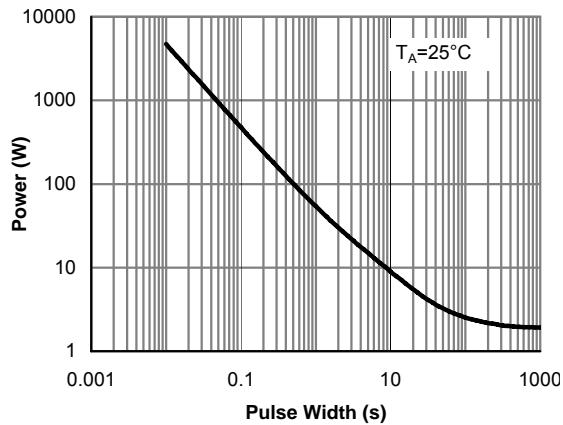


Figure 12: Single Pulse Power Rating Junction-to-Ambient for AOT474 (Note G)

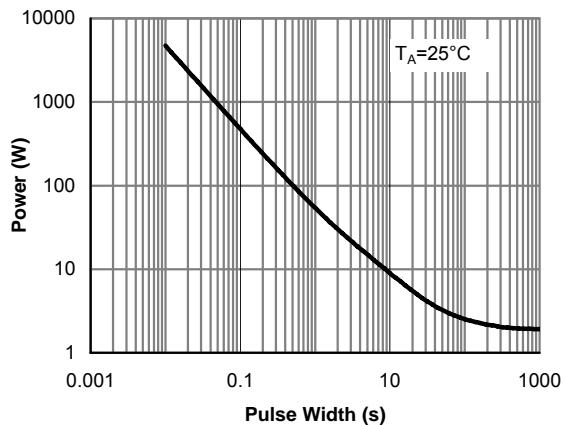


Figure 13: Single Pulse Power Rating Junction-to-Ambient for AOTF474 (Note G)

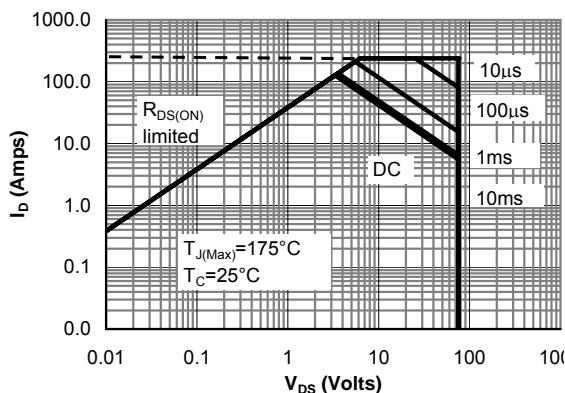


Figure 14: Maximum Forward Biased Safe Operating Area for AOT474 (Note F)

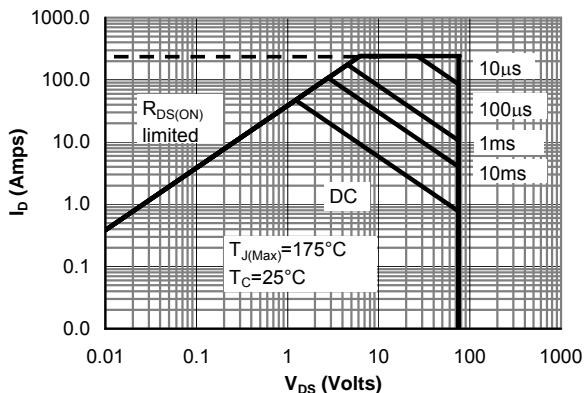


Figure 15: Maximum Forward Biased Safe Operating Area for AOTF474 (Note F)


TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Figure 16: Normalized Maximum Transient Thermal Impedance for AOT474 (Note F)








Figure 17: Normalized Maximum Transient Thermal Impedance for AOTF474 (Note F)



Gate Charge Test Circuit & Waveform

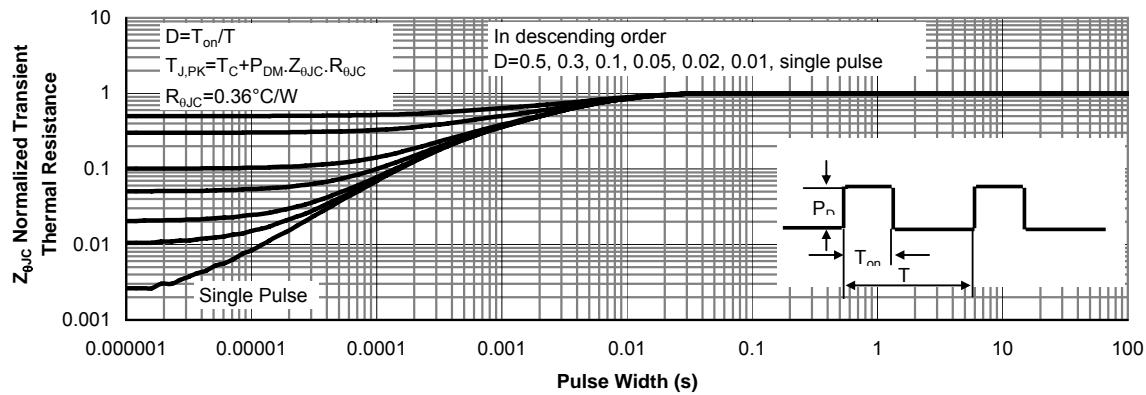

Resistive Switching Test Circuit & Waveforms

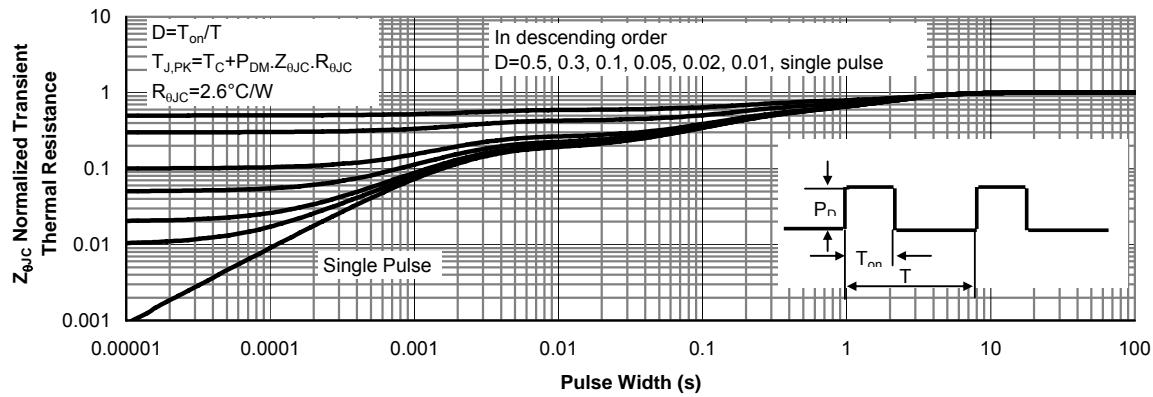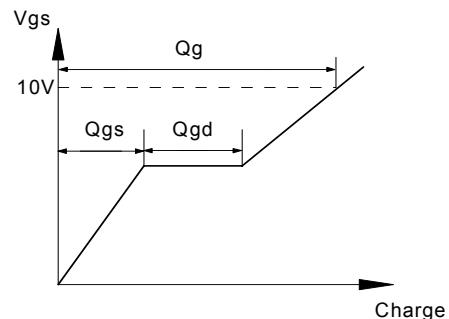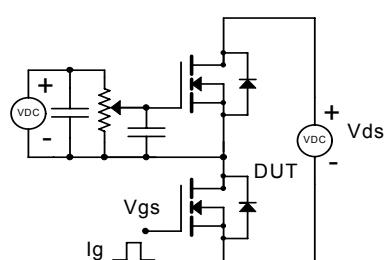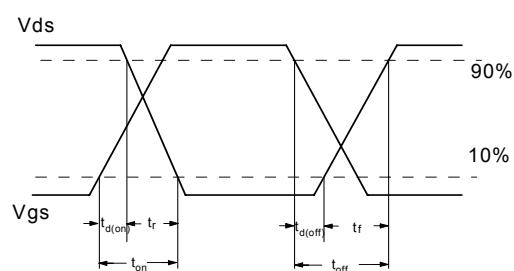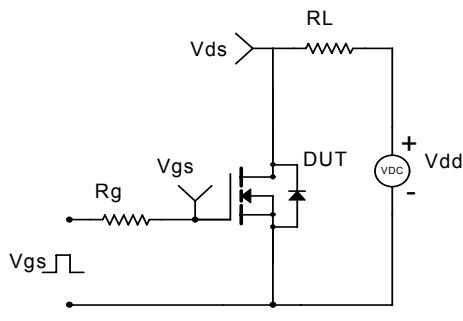

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

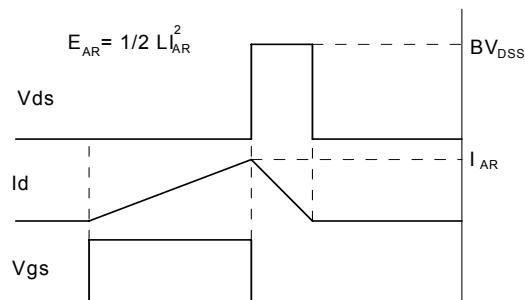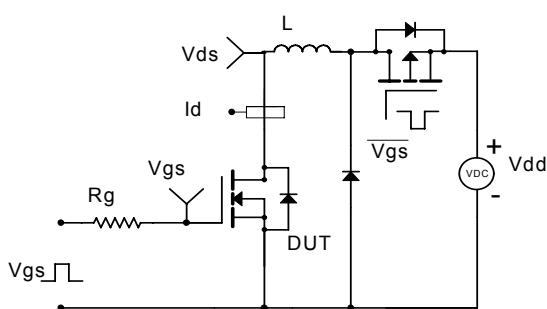

Diode Recovery Test Circuit & Waveforms

