


Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**Intellimod™ L-Series**  
**Three Phase**  
**IGBT Inverter**  
**25 Amperes/1200 Volts**

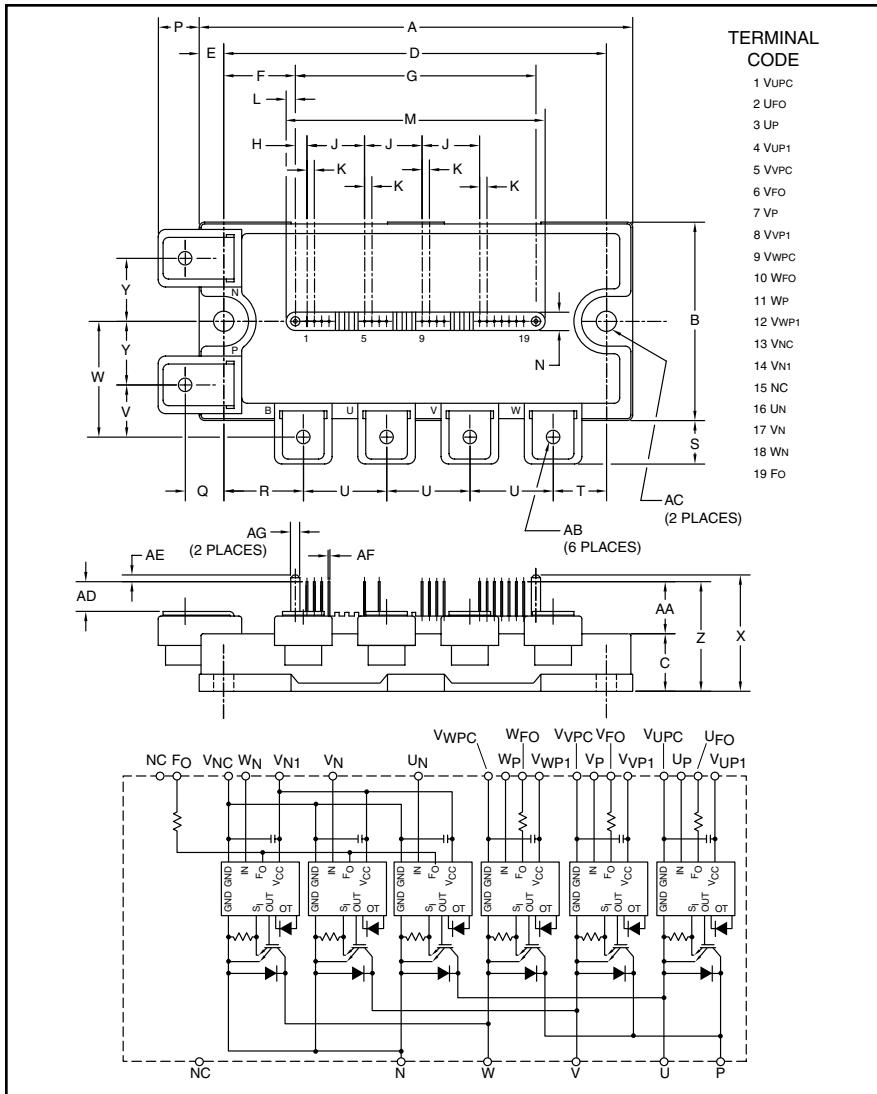

### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Temperature Using On-chip Temperature Sensing
  - Under Voltage
- Low Loss Using 5th Generation IGBT Chip

### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

### Ordering Information:

Example: Select the complete part number from the table below  
 -i.e. PM25CLA120 is a 1200V, 25 Ampere Intellimod™ Intelligent Power Module.

| Dimensions | Inches | Millimeters |
|------------|--------|-------------|
| A          | 4.72   | 120.0       |
| B          | 2.17   | 55.0        |
| C          | 0.63   | 16.0        |
| D          | 4.17   | 106.0       |
| E          | 0.28   | 7.0         |
| F          | 0.78   | 19.75       |
| G          | 2.62   | 66.5        |
| H          | 0.13   | 3.25        |
| J          | 0.63   | 16.0        |
| K          | 0.08   | 2.0         |
| L          | 0.10   | 2.5         |
| M          | 2.81   | 71.5        |
| N          | 0.20   | 5.0         |
| P          | 0.43   | 11.0        |
| Q          | 0.42   | 10.75       |
| R          | 0.87   | 22.0        |

| Dimensions | Inches    | Millimeters |
|------------|-----------|-------------|
| S          | 0.46      | 11.75       |
| T          | 0.59      | 15.0        |
| U          | 0.91      | 23.0        |
| V          | 0.57      | 14.5        |
| W          | 1.26      | 32.0        |
| X          | 1.22      | 31.0        |
| Y          | 0.69      | 17.5        |
| Z          | 1.14      | 29.0        |
| AA         | 0.51      | 13.0        |
| AB         | M5 Metric | M5          |
| AC         | 0.22 Dia. | Dia. 5.5    |
| AD         | 0.28      | 7.0         |
| AE         | 0.08      | 2.0         |
| AF         | 0.02 Sq.  | Sq. 0.5     |
| AG         | 0.10 Dia. | Dia. 2.5    |

| Type | Current Rating Amperes | V <sub>CES</sub> Volts (x 10) |
|------|------------------------|-------------------------------|
| PM   | 25                     | 120                           |



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM25CLA120**

**Intellimod™ L-Series**

**Three Phase IGBT Inverter**

**25 Amperes/1200 Volts**

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

| Characteristics   | Symbol                 | PM25CLA120 | Units            |
|---|------------------------|------------|------------------|
| Power Device Junction Temperature   | $T_j$                  | -20 to 150 | $^\circ\text{C}$ |
| Storage Temperature   | $T_{stg}$              | -40 to 125 | $^\circ\text{C}$ |
| Mounting Torque, M5 Mounting Screws   | —                      | 31         | in-lb            |
| Mounting Torque, M5 Main Terminal Screws                                    | —                      | 31         | in-lb            |
| Module Weight (Typical)   | —                      | 380        | Grams            |
| Supply Voltage, Surge (Applied between P - N)                               | $V_{CC(\text{surge})}$ | 1000       | Volts            |
| Self-protection Supply Voltage Limit (Short Circuit protection Capability)* | $V_{CC(\text{prot.})}$ | 800        | Volts            |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal                             | $V_{ISO}$              | 2500       | Volts            |

\*VD = 13.5 ~ 16.5V, Inverter Part,  $T_j = 125^\circ\text{C}$

**IGBT Inverter Sector**

|   |              |      |         |
|---|--------------|------|---------|
| Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{CIN} = 15\text{V}$ ) | $V_{CES}$    | 1200 | Volts   |
| Collector Current ( $T_C = 25^\circ\text{C}$ )                            | $\pm I_C$    | 25   | Amperes |
| Peak Collector Current ( $T_C = 25^\circ\text{C}$ )                       | $\pm I_{CP}$ | 50   | Amperes |
| Collector Dissipation ( $T_C = 25^\circ\text{C}$ )                        | $P_C$        | 116  | Watts   |

**Control Sector**

|   |           |    |       |
|---|-----------|----|-------|
| Supply Voltage (Applied between $U_{UP1}-V_{UPC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$ ) | $V_D$     | 20 | Volts |
| Input Voltage (Applied between $U_P-V_{UPC}$ , $V_P-V_{VPC}$ , $W_P-V_{WPC}$ , $U_N-V_N$ , $W_N-V_{NC}$ )     | $V_{CIN}$ | 20 | Volts |
| Fault Output Supply Voltage   | $V_{FO}$  | 20 | Volts |
| (Applied between $U_{FO}-V_{UPC}$ , $V_{FO}-V_{VPC}$ , $W_{FO}-V_{WPC}$ , $F_O-V_{NC}$ )                      |           |    |       |
| Fault Output Current ( $U_{FO}$ , $V_{FO}$ , $W_{FO}$ , $F_O$ Terminals)                                      | $I_{FO}$  | 20 | mA    |


**PM25CLA120**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter**  
25 Amperes/1200 Volts

### Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics                           | Symbol               | Test Conditions  | Min. | Typ. | Max. | Units            |
|---|----------------------|--|------|------|------|------------------|
| <b>IGBT Inverter Sector</b>               |                      |  |      |      |      |                  |
| Collector-Emitter Cutoff Current          | $I_{CES}$            | $V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$                | —    | —    | 1.0  | mA               |
|   |                      | $V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$               | —    | —    | 10   | mA               |
| Diode Forward Voltage                     | $V_{EC}$             | $-I_C = 25\text{A}, V_{CIN} = 15V, V_D = 15V$                        | —    | 2.5  | 3.5  | Volts            |
| Collector-Emitter Saturation Voltage      | $V_{CE(\text{sat})}$ | $V_D = 15V, V_{CIN} = 0V, I_C = 25\text{A}, T_j = 25^\circ\text{C}$  | —    | 1.8  | 2.3  | Volts            |
|   |                      | $V_D = 15V, V_{CIN} = 0V, I_C = 25\text{A}, T_j = 125^\circ\text{C}$ | —    | 1.9  | 2.4  | Volts            |
| Inductive Load Switching Times            | $t_{on}$             |  | 0.5  | 1.0  | 2.5  | $\mu\text{s}$    |
|   | $t_{rr}$             | $V_D = 15V, V_{CIN} = 0 \Leftrightarrow 15V$                         | —    | 0.5  | 0.8  | $\mu\text{s}$    |
|   | $t_{C(on)}$          | $V_{CC} = 600V, I_C = 25\text{A}$                                    | —    | 0.4  | 1.0  | $\mu\text{s}$    |
|   | $t_{off}$            | $T_j = 125^\circ\text{C}$  | —    | 2.0  | 3.0  | $\mu\text{s}$    |
|   | $t_{C(off)}$         |  | —    | 0.7  | 1.2  | $\mu\text{s}$    |
| <b>Control Sector</b>                     |                      |  |      |      |      |                  |
| Short Circuit Trip Level                  | $SC$                 | $-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15V$       | 50   | —    | —    | Amperes          |
| Short Circuit Current Delay Time          | $t_{off(SC)}$        | $V_D = 15V$  | —    | 0.2  | —    | $\mu\text{s}$    |
| Over Temperature Protection               | $OT$                 | Trip Level   | 135  | 145  | 155  | $^\circ\text{C}$ |
| (Detect $T_j$ of IGBT Chip)               | $OT_R$               | Reset Level  | —    | 125  | —    | $^\circ\text{C}$ |
| Supply Circuit Under-voltage Protection   | $UV$                 | Trip Level   | 11.5 | 12.0 | 12.5 | Volts            |
| ( $-20 \leq T_j \leq 125^\circ\text{C}$ ) | $UV_R$               | Reset Level  | —    | 12.5 | —    | Volts            |
| Circuit Current                           | $I_D$                | $V_D = 15V, V_{CIN} = 15V, V_{N1}-V_{NC}$                            | —    | 15   | 25   | mA               |
|   |                      | $V_D = 15V, V_{CIN} = 15V, V_{XP1}-V_{XPC}$                          | —    | 5    | 10   | mA               |
| Input ON Threshold Voltage                | $V_{th(on)}$         | Applied between Up-V <sub>UPC</sub> ,                                | 1.2  | 1.5  | 1.8  | Volts            |
| Input OFF Threshold Voltage               | $V_{th(off)}$        | $V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N-W_N-V_{NC}$                       | 1.7  | 2.0  | 2.3  | Volts            |
| Fault Output Current*                     | $I_{FO(H)}$          | $V_D = 15V, V_{CIN} = 15V$   | —    | —    | 0.01 | mA               |
|   | $I_{FO(L)}$          | $V_D = 15V, V_{CIN} = 15V$   | —    | 10   | 15   | mA               |
| Fault Output Pulse Width*                 | $t_{FO}$             | $V_D = 15V$  | 1.0  | 1.8  | —    | ms               |

\*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower devide operate to protect it.

$T_C$  Measurement Point

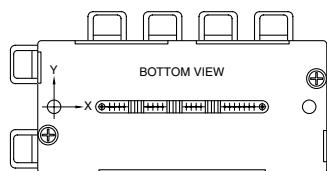

| Axis \ Arm | UP   |      | VP   |      | WP   |      | UN   |      | VN   |      | WN   |      |
|------------|------|------|------|------|------|------|------|------|------|------|------|------|
|            | IGBT | FWDi |
| X          | 29.0 | 29.3 | 64.0 | 65.5 | 85.6 | 85.9 | 37.8 | 37.5 | 55.2 | 55.7 | 75.8 | 75.3 |
| Y          | -7.1 | 1.5  | -7.1 | 2.0  | -7.1 | 2.0  | 5.1  | -4.5 | 5.1  | -4.5 | 5.1  | -4.5 |



Powerex, Inc., 200 E. Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM25CLA120**  
Intellimod™ L-Series  
Three Phase IGBT Inverter  
25 Amperes/1200 Volts

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

| Characteristics                     | Symbol         | Test Conditions                                   | Min. | Typ. | Max.  | Units   |
|-------------------------------------|----------------|---|------|------|-------|---------|
| <b>Thermal Characteristics</b>      |                |   |      |      |       |         |
| Characteristic                      | Symbol         | Condition   | Min. | Typ. | Max.  | Units   |
| Junction to Case Thermal Resistance | $R_{th(j-c)Q}$ | IGBT (Per 1/6 Module)                             | —    | —    | 0.83* | °C/Watt |
|                                     | $R_{th(j-c)D}$ | FWDI (Per 1/6 Module)                             | —    | —    | 1.36* | °C/Watt |
| Contact Thermal Resistance          | $R_{th(c-f)}$  | Case to Fin Per Module,<br>Thermal Grease Applied | —    | —    | 0.038 | °C/Watt |










\* If you use this value,  $R_{th(f-a)}$  should be measured just under the chips.

**Recommended Conditions for Use**

| Characteristic                  | Symbol         | Condition  | Value          | Units |
|---------------------------------|----------------|--|----------------|-------|
| Supply Voltage                  | $V_{CC}$       | Applied across P-N Terminals   | $\leq 800$     | Volts |
| Control Supply Voltage**        | $V_D$          | Applied between $V_{UP1}-V_{UPC}$ ,<br>$V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$ , $V_{N1}-V_{NC}$ | $15.0 \pm 1.5$ | Volts |
| Input ON Voltage                | $V_{CIN(on)}$  | Applied between $U_P-V_{UPC}$ ,  | $\leq 0.8$     | Volts |
| Input OFF Voltage               | $V_{CIN(off)}$ | $V_P-V_{VPC}$ , $W_P-V_{WPC}$ , $U_N-V_N$ , $W_N-V_{NC}$                                       | $\geq 9.0$     | Volts |
| PWM Input Frequency             | $f_{PWM}$      | —  | $\leq 20$      | kHz   |
| Arm Shoot-through Blocking Time | $t_{DEAD}$     | Input Signal   | $\geq 2.5$     | μs    |

\*\* With ripple satisfying the following conditions:  $dv/dt$  swing  $\leq \pm 5V/\mu s$ , Variation  $\leq 2V$  peak to peak.

**PM25CLA120**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter**  
 25 Amperes/1200 Volts

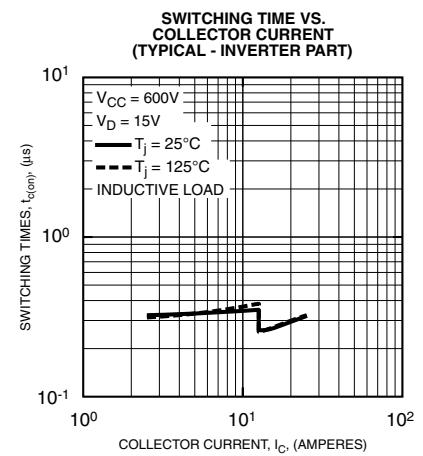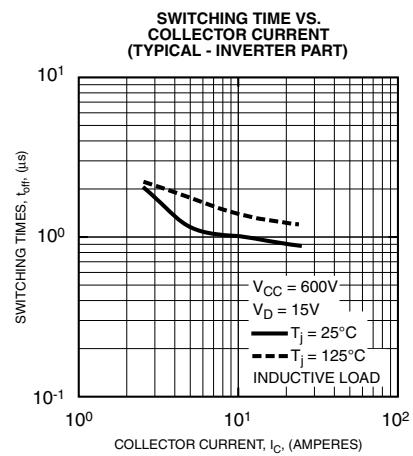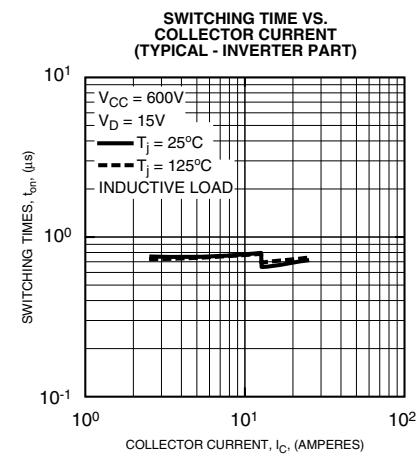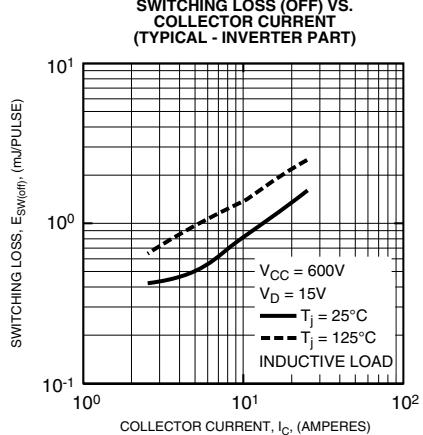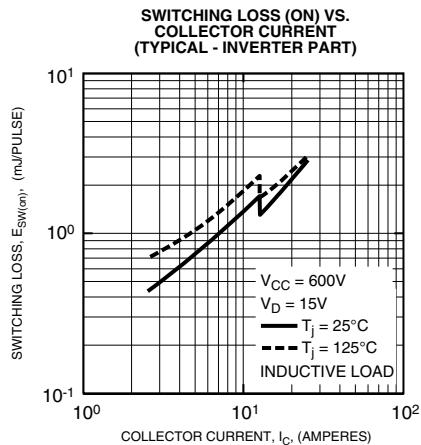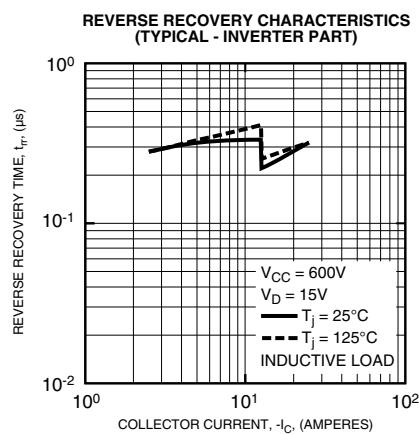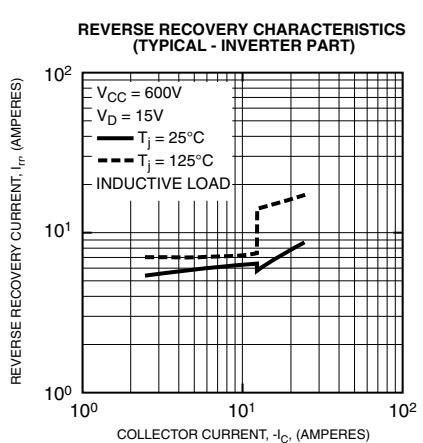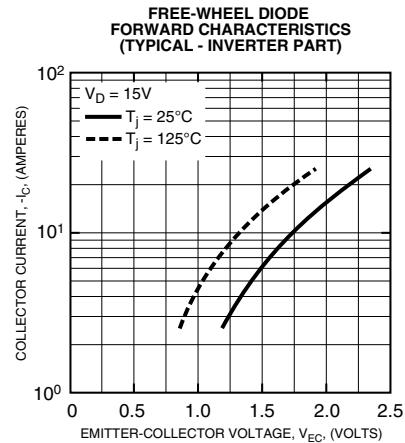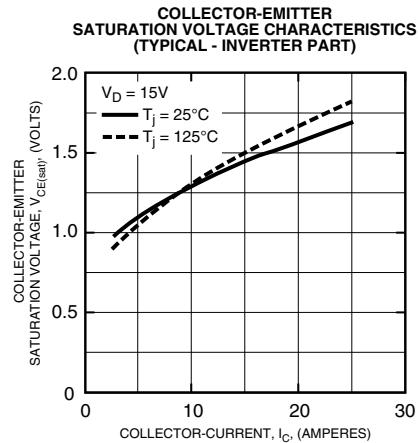

**PM25CLA120**

Intellimod™ L-Series

Three Phase IGBT Inverter

25 Amperes/1200 Volts

