





# **Application & Main Feature**

Commercial Grade (Safety Standard Approved)

## **Series**

**CS** Series

# **Dimensions**

7.0mm Max. 5.0mm Max.

7.5mm +/-0.8mm 0.6mm +/-0.05mm

# Temperature Characteristic

B(+/-10%)

### Rated Voltage

440Vac

#### Withstanding Voltage

2600Vac

### Capacitance

150pF

### Capacitance Tolerance

+/-10%

### Dissipation Factor

2.5% Max.

### Insulation Resistance


10000Mohm Min.

#### AEC-Q200


Not Applicable

### Lead Length / Package Type

**Taping** 





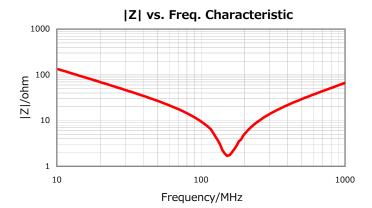

## **Temperature Characteristic**

