NOTES:

1. MAX. MOUNTING TORQUE = 4 lb–in.
2. HARDWARE IS INCLUDED.
3. THIS IS A LEAD FREE PRODUCT.
4. MAX REFLOW IS 245°C FOR 5 SEC.

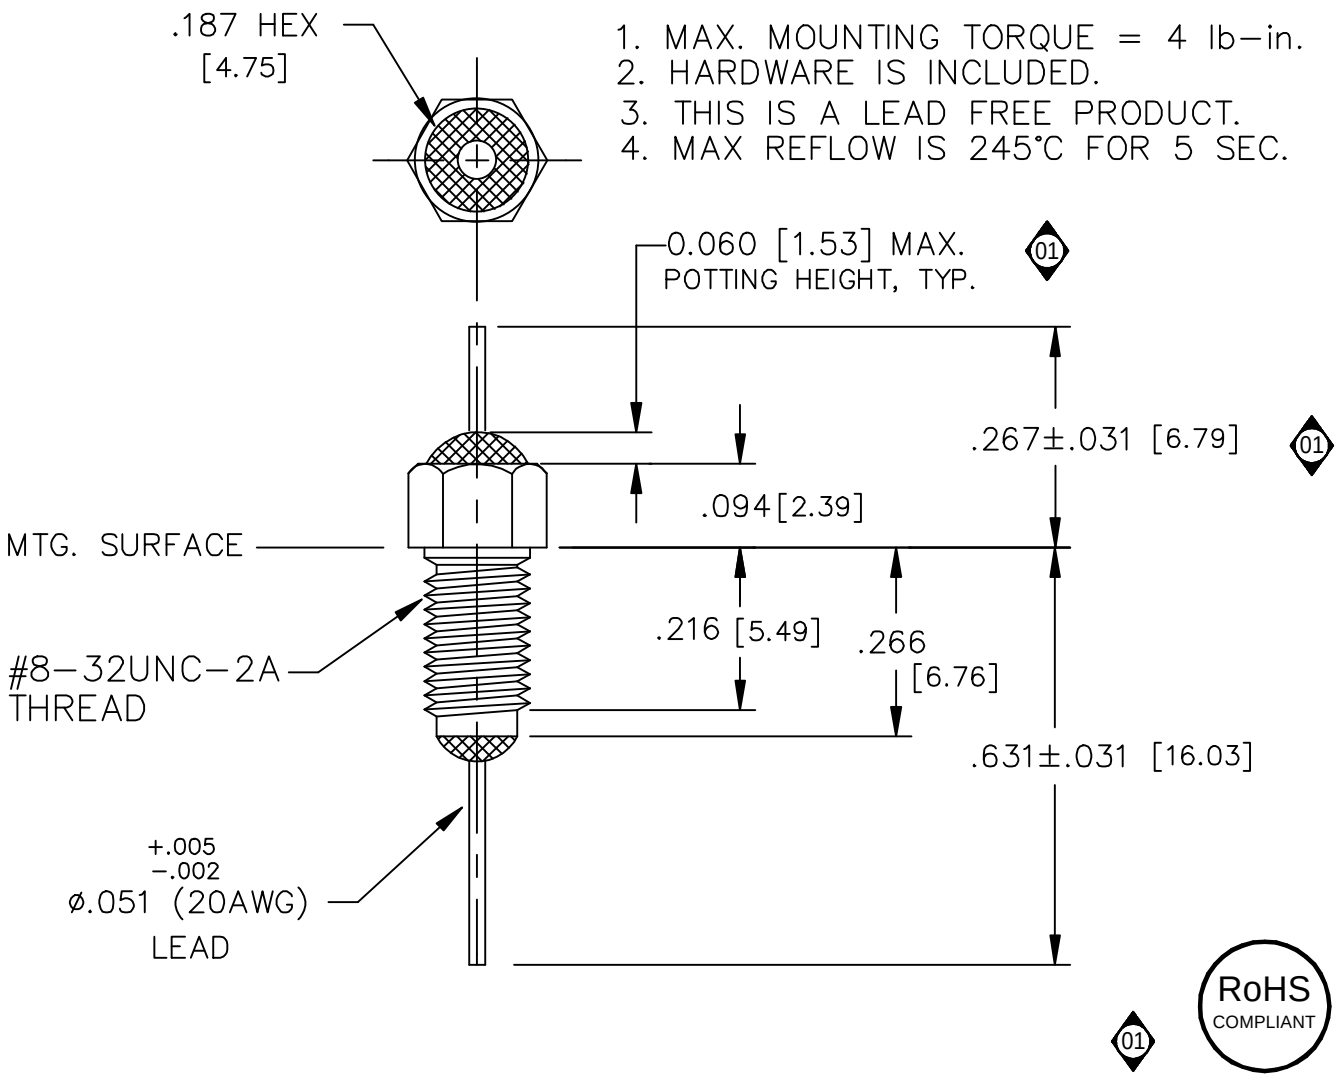

RoHS COMPLIANT

LEAD FINISH:	TIN/SILVER
BUSHING FINISH:	SILVER
CAPACITANCE	100pF±20%
TEMP. RANGE	–55°C TO 85°C
CURRENT	20 AMP MAX.
WORKING VOLTAGE	125°C 300 VDC -----
D.C. RESISTANCE	.01ohms MAX.

MIN. I.L. PER MIL–STD–220 AT 25°C NO LOAD

FREQ. MHz	I.L. (db)
300	10
1 GHz	20
10 GHz	25

SCHEMATIC

MARKING:

PART: SF104
BAG PACK:
54F–713–104
DATE CODE
QTY./BAG
(200/BAG MAX.)

REV. NO.	CHANGE NOTICE	
01	CN 27958-CPD	
00	CN 18635-CPD	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. [MILLIMETERS] DO NOT SCALE.

THIRD ANGLE PROJECTION

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx±.010
Angles ±0° 30′

CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.

ERIE, FAIRVIEW PENNSYLVANIA

Dwn. KNOWLTON
DATE 6–9–06
Engr. R. STRUCHEN
Scale NONE

Description FT
RESIN SEAL FILTER

54F–713–104