S1D13L04



S1D13L04 XGA Simple LCD Controller

The S1D13L04 is a simple, multi-purpose graphics LCD controller which supports color TFT LCD panels with up to XGA resolution. With an external SDRAM memory controller, it allows up to 16Mbyte as a display frame buffer. The S1D13L04 supports most popular CPU interfaces in both 16-bit and direct/indirect variations.

The S1D13L04's combination of multiple CPU interfaces and display interface types offers a versatile, yet easy to develop display system. Additionally, it offers such features as multiple windows (PIP), alpha blending, gamma correction, and mirror/rotation which allow user configurability of various images on the Main/PIP1/PIP2 windows.


The S1D13L04 is a flexible, low cost, low power solution that meets the demands of embedded markets such as medical, office automation, factory automation, home automation and measuring instruments, where total system cost concerns can still be met when using TFT panels up to XGA resolution. Additionally, it's impartiality to CPU type or operating system also makes it an ideal display solution for a wide variety of other applications.

FEATURES

- Direct and indirect CPU interfaces
- Serial host interface
- Memory interface for x16 external SDRAM
- · Programmable resolutions and color depths
- Support for single RGB panel with serial command interface
- Mutiple windows with overlay features (main, PIP1, PIP2)
- Alpha blending (PIP2)
- Gamma correction LUT (256 x 24 bit x 2 banks)

- 4-channel PWM for backlight control
- Software initiated power save mode
- General purpose input/output pins
- IOVDD: 3.3, CORE/OSC/PLLVDD: 1.8V
- Clocks can be selected from two embedded PLLs or digital clock inputs
- Two built-in Crystal inputs
- Temperature range: -40°~ 85°C
- Package: QFP 208-pin,0.5mm pin pitch

SYSTEM BLOCK DIAGRAM

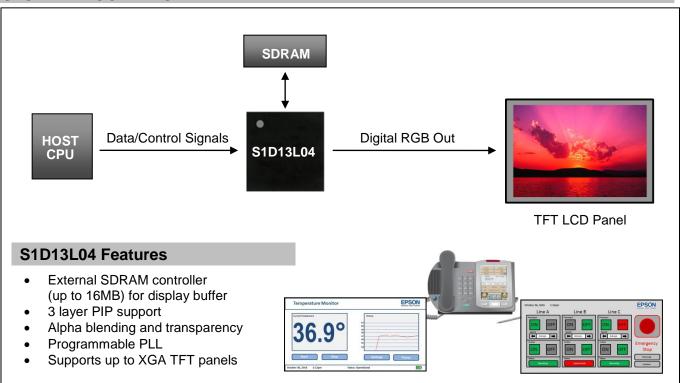

S1D13L04



DESCRIPTION

Display Memory

- Uses external SDRAM or mobile SDRAM as a display buffer (Size: 8M byte or 16M byte)
- SDRAM clock: 100MHz Maximum
- Automatic re-entry into self-refresh mode

Display Support

- RGB interface single panel
- 16/18-bit color TFT
- Optional serial command interface
- Color depths up to 32 bpp
- Example resolutions
 - 1024x768 at a color depth of 16 bpp
 - 800x600 at a color depth of 16 bpp
 - 640x480 at a color depth of 32 bpp

Display Features

- Multiple window (layer) support
- Mirror and 180° rotation functions
- Alpha blending
- Gamma correction
- Pseudo color expansion

CPU Interface

- Direct and indirect interface support for most popular **CPU** interfaces
- Serial host interface
- Registers are memory-mapped M/R# input selects between memory and register addresses

Miscellaneous

- Internal system clock: 50MHz maximum
- (half of SDRAM clock)
- 4 channel PWM for backlight control
- Multiple general purpose input/output pins
- Flexible clock structure:
 - Two embedded PLLs
 - Two built-in crystal inputs 0

TAIWAN

- Two digital clock inputs
- Clocks dynamically turned off when modules are not needed
- Interrupts available
- PLL/OSC/COREVDD 1.8 volts, IOVDD 3.3 volts
- Package: QFP 208-pin

JAPAN **SEIKO EPSON CORPORATION**

IC Sales & Marketing Department 421-8 Hino, Hino-shi, Tokyo 191-8501, JAPAN FAX: +81-42-587-5117 Phone: +81-42-587-5816

AMERICA EPSON ELECTRONICS AMERICA, INC.

214 Devcon Drive, San Jose, CA 95112,

Phone: +1-800-228-3964

FAX: +1-408-922-0238

CHINA EPSON (CHINA) CO., LTD

4th Floor, Tower 1 of China Central Place, 81 Jianguo Road, Chaoyang District, Beijing 100025, CHINA

Phone: +86-10-8522-1199 FAX: +86-10-8522-1120

Tainei 110 TAIWAN

14F. No. 7. Song Ren Road.

Phone: +886-2-8786-6688 FAX: +886-2-8786-6660

EPSON TAIWAN TECHNOLOGY & TRADING LTD.

CHINA SHANGHAI Branch

Room 01 & 04 17F, Greenland Center II, 562 Dong An Road, Shanghai 200032, CHINA

Phone: +86-21-5423-5577 FAX: +86-21-5423-4677

SINGAPORE **EPSON SINGAPORE PTE., LTD.** 1 HarbourFront Place,

#03-02 HarbourFront Tower One, SINGAPORE 098633 Phone: +65-6586-5500 FAX: +65-6271-3182

EUROPE EPSON EUROPE ELECTRONICS GmbH

Riesstrasse 15, 80992 Munich.

Phone: +49-89-14005-0 FAX: +49-89-14005-110

CHINA **SHENZHEN Branch**

Room 804-805 8th Floor Tower 2 Ali Center No.3331 Keyuan South RD (Shenzhen bay), Nanshan District, Shenzhen 518054, CHINA

Phone: +86-10-3299-0588 FAX: +86-10-3299-0560

KOREA SEIKO EPSON CORP.

19F, KLI 63 Bldg., 60 Yoido-dong, Youngdeungpo-Ku, Seoul 150-763, KOREA

Phone: +82-2-784-6027 FAX: +82-2-767-3677



http://global.epson.com/products/semicon

Document code: XB3A-C-001-01.2 NOTICE:

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You are requested not to use, to resell, to export and/or to otherwise dispose of the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes.

All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies. ©Seiko Epson Corporation 2015, 2017. All rights reserved.