



Application & Main Feature

Commercial Grade (Safety Standard Approved)

Series

CS Series

Dimensions

9.5mm Max. D 5.0mm Max.

7.5mm +/-0.8mm 0.6mm +/-0.05mm

Temperature Characteristic

Z5U(+22,-56%)

Rated Voltage

440Vac

Withstanding Voltage

2600Vac

Capacitance

3.3nF

Capacitance Tolerance

+/-20%

Dissipation Factor

2.5% Max.

Insulation Resistance


10000Mohm Min.

AEC-Q200


Not Applicable

Lead Length / Package Type

Taping





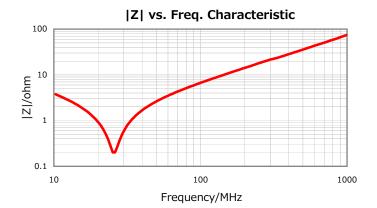

Temperature Characteristic 20

