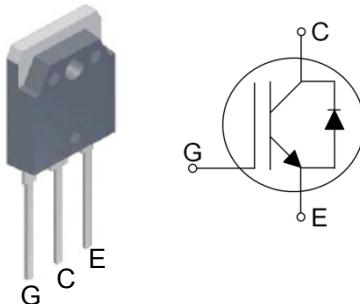


Features:

- 1350V Field Stop Trench Technology
- High Speed Switching
- Low Conduction Loss
- Positive Temperature Coefficient
- Easy Parallel Operation
- RoHS Compliant
- JEDEC Qualification


Applications :

Induction Heating, Soft switching application

| Device | Package | Marking | Remark |
|------------------|---------|------------------|--------|
| GPA030A135MN-FDR | TO-3PN | GPA030A135MN-FDR | RoHS |

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|--|-----------|-----------|------|
| Collector-Emitter Voltage | V_{CES} | 1350 | V |
| Gate-Emitter Voltage | V_{GES} | ± 20 | V |
| Continuous Collector Current | I_c | 60 | A |
| | | 30 | A |
| Pulsed Collector Current (Note 1) | I_{CM} | 90 | A |
| Diode Continuous Forward Current | I_F | 30 | A |
| Power Dissipation | P_D | 329 | W |
| | | 132 | W |
| Operating Junction Temperature | T_J | -55 ~ 150 | °C |
| Storage Temperature Range | T_{STG} | -55 ~ 150 | °C |
| Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds | T_L | 300 | °C |

Notes :

(1) Repetitive rating : Pulse width limited by maximum junction temperature

Thermal Characteristics

| Parameter | Symbol | Value | Unit |
|---|-------------------------|-------|------|
| Maximum Thermal resistance, Junction-to-Case | $R_{\theta JC}$ (IGBT) | 0.38 | °C/W |
| Maximum Thermal resistance, Junction-to-Case | $R_{\theta JC}$ (DIODE) | 2.1 | °C/W |
| Maximum Thermal resistance, Junction-to-Ambient | $R_{\theta JA}$ | 40 | °C/W |

Electrical Characteristics of the IGBT $T_c=25^\circ\text{C}$, unless otherwise noted

| Parameter | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|-----------------------------|---|------|------|-----------|------|
| OFF | | | | | | |
| Collector – Emitter Breakdown Voltage | BV_{CES} | $V_{\text{GE}} = 0\text{V}, I_{\text{C}} = 1\text{mA}$ | 1350 | -- | -- | V |
| Zero Gate Voltage Collector Current | I_{CES} | $V_{\text{CE}} = 1350\text{V}, V_{\text{GE}} = 0\text{V}$ | -- | -- | 1 | mA |
| Gate – Emitter Leakage Current | I_{GES} | $V_{\text{CE}} = 0\text{V}, V_{\text{GE}} = \pm 20\text{V}$ | -- | -- | ± 250 | nA |
| ON | | | | | | |
| Gate – Emitter Threshold Voltage | $V_{\text{GE}(\text{TH})}$ | $V_{\text{GE}} = V_{\text{CE}}, I_{\text{C}} = 30\text{mA}$ | 4.5 | 6.0 | 7.5 | V |
| Collector – Emitter Saturation Voltage | $V_{\text{CE}(\text{SAT})}$ | $V_{\text{GE}} = 15\text{V}, I_{\text{C}} = 30\text{A}, T_c = 25^\circ\text{C}$ | -- | 1.9 | 2.4 | V |
| | | $V_{\text{GE}} = 15\text{V}, I_{\text{C}} = 30\text{A}, T_c = 125^\circ\text{C}$ | -- | 2.2 | -- | V |
| DYNAMIC | | | | | | |
| Input Capacitance | C_{IES} | $V_{\text{CE}} = 30\text{V}, V_{\text{GE}} = 0\text{V}$ $f = 1\text{MHz}$ | -- | 3570 | -- | pF |
| Output Capacitance | C_{OES} | | -- | 85 | -- | pF |
| Reverse Transfer Capacitance | C_{RES} | | -- | 55 | -- | pF |
| SWITCHING (Note 2) | | | | | | |
| Turn-On Delay Time | $t_{\text{d}(\text{on})}$ | $V_{\text{CC}} = 600\text{V}, I_{\text{C}} = 30\text{A}$ $R_{\text{G}} = 5\Omega, V_{\text{GE}} = 15\text{V}$ Inductive Load, $T_c = 25^\circ\text{C}$ | -- | 30 | -- | ns |
| Rise Time | t_r | | -- | 35 | -- | ns |
| Turn-Off Delay Time | $t_{\text{d}(\text{off})}$ | | -- | 145 | -- | ns |
| Fall Time | t_f | | -- | 115 | 172 | ns |
| Turn-On Switching Loss | E_{ON} | | -- | 4.4 | 6.6 | mJ |
| Turn-Off Switching Loss | E_{OFF} | | -- | 1.18 | 1.77 | mJ |
| Total Switching Loss | E_{TS} | | -- | 5.56 | 8.37 | mJ |
| Turn-On Delay Time | $t_{\text{d}(\text{on})}$ | | -- | 30 | -- | ns |
| Rise Time | t_r | $V_{\text{CC}} = 600\text{V}, I_{\text{C}} = 30\text{A}$ $R_{\text{G}} = 5\Omega, V_{\text{GE}} = 15\text{V}$ Inductive Load, $T_c = 125^\circ\text{C}$ | -- | 35 | -- | ns |
| Turn-Off Delay Time | $t_{\text{d}(\text{off})}$ | | -- | 160 | -- | ns |
| Fall Time | t_f | | -- | 230 | -- | ns |
| Turn-On Switching Loss | E_{ON} | | -- | 4.48 | 6.72 | mJ |
| Turn-Off Switching Loss | E_{OFF} | | -- | 2.3 | 3.45 | mJ |
| Total Switching Loss | E_{TS} | | -- | 6.78 | 10.17 | mJ |
| Total Gate Charge | Q_g | $V_{\text{CC}} = 600\text{V}, I_{\text{C}} = 30\text{A}$ $V_{\text{GE}} = 15\text{V}$ | -- | 200 | 300 | nC |
| Gate-Emitter Charge | Q_{ge} | | -- | 25 | 37 | nC |
| Gate-Collector Charge | Q_{gc} | | -- | 95 | 142 | nC |

Notes :

(2) Not subject to production test – verified by design/characterization

Electrical Characteristics of the DIODE $T_c=25^\circ\text{C}$, unless otherwise noted

| Parameter | Symbol | Test condition | | Min. | Typ. | Max. | Unit | |
|--------------------------|----------|--|---------------------------|------|------|------|------|--|
| Diode Forward Voltage | V_{FM} | $I_F = 30\text{A}$ | $T_C = 25^\circ\text{C}$ | -- | 2.25 | 2.75 | V | |
| | | | $T_C = 125^\circ\text{C}$ | -- | 2.53 | -- | | |
| Reverse Recovery Time | t_{rr} | $I_F = 30\text{A},$ $di/dt = 200\text{A}/\mu\text{s}$ | $T_C = 25^\circ\text{C}$ | -- | 300 | 450 | ns | |
| | | | $T_C = 125^\circ\text{C}$ | -- | 360 | -- | | |
| Reverse Recovery Current | I_{rr} | | $T_C = 25^\circ\text{C}$ | -- | 30 | 45 | A | |
| | | | $T_C = 125^\circ\text{C}$ | -- | 34 | -- | | |
| Reverse Recovery Charge | Q_{rr} | | $T_C = 25^\circ\text{C}$ | -- | 4400 | -- | nC | |
| | | | $T_C = 125^\circ\text{C}$ | -- | 6120 | -- | | |

IGBT Characteristics

Fig. 1 Output characteristics

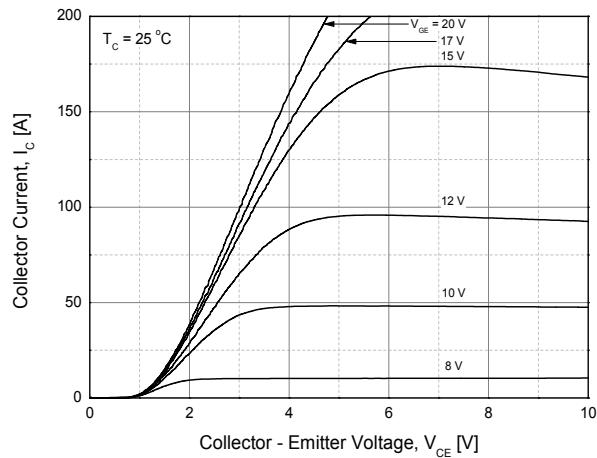


Fig. 2 Saturation voltage characteristics

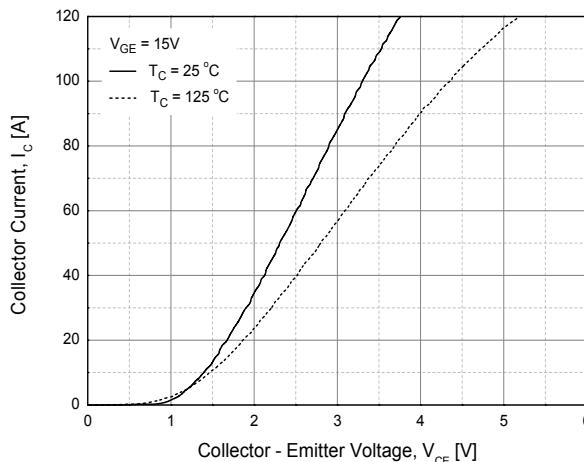


Fig. 3 Saturation voltage vs. collector current

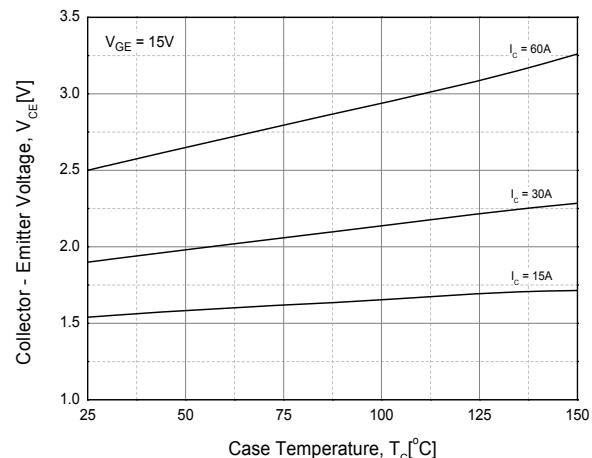


Fig. 4 Saturation voltage vs. gate bias

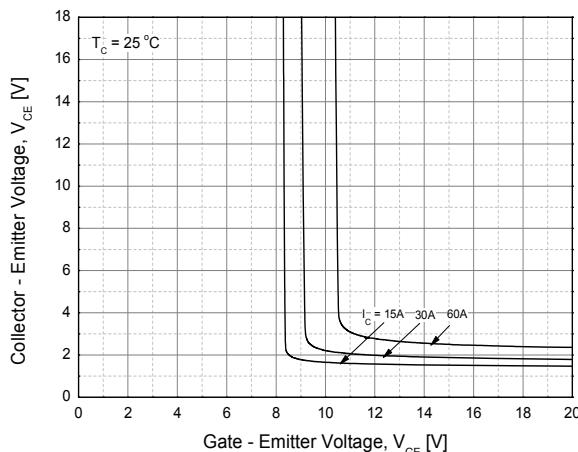


Fig. 5 Saturation voltage vs. gate bias


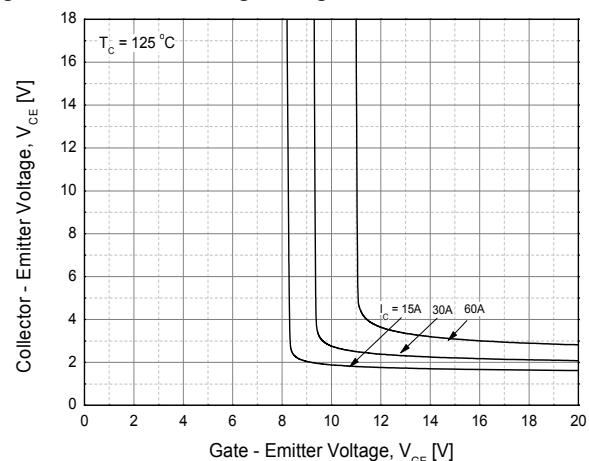


Fig. 6 Capacitance characteristics

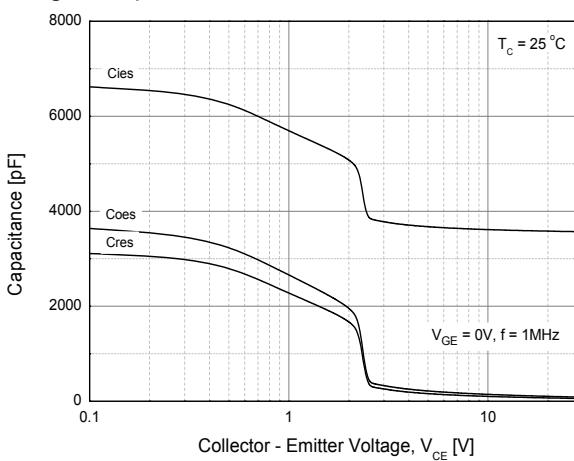

IGBT Characteristics

Fig. 7 Turn-on time vs. gate resistor

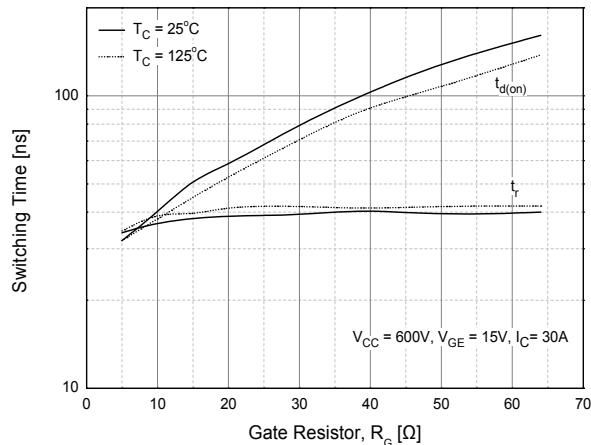


Fig. 8 Turn-off time vs. gate resistor

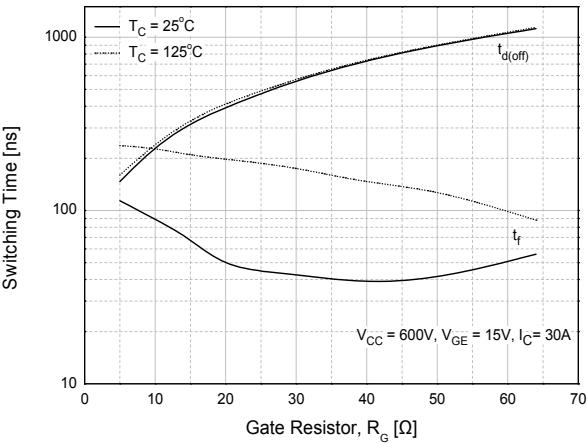


Fig. 9 Switching loss vs. gate resistor

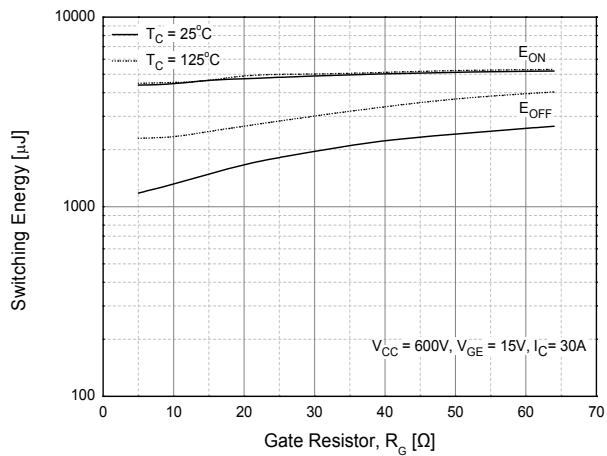


Fig. 10 Turn-on time vs. collector current

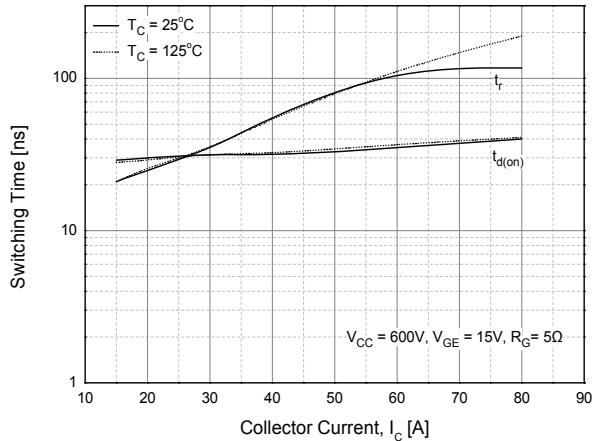


Fig. 11 Turn-off time vs. collector current


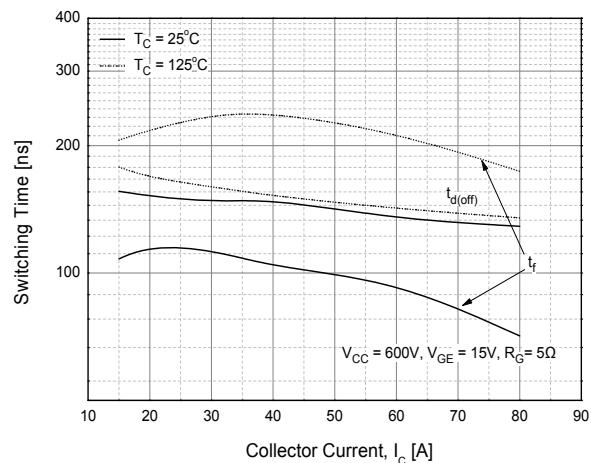


Fig. 12 Switching loss vs. collector current

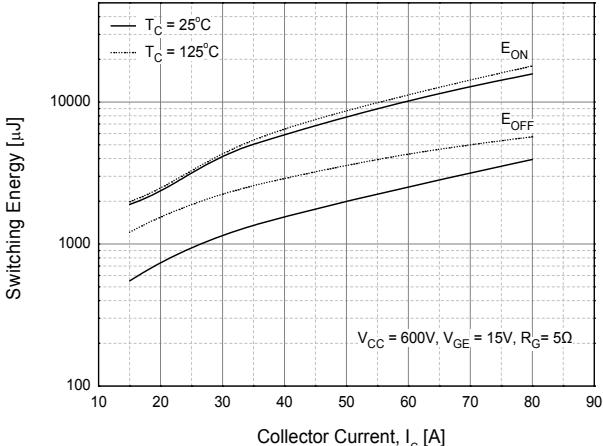

IGBT Characteristics

Fig. 13 Gate charge characteristics

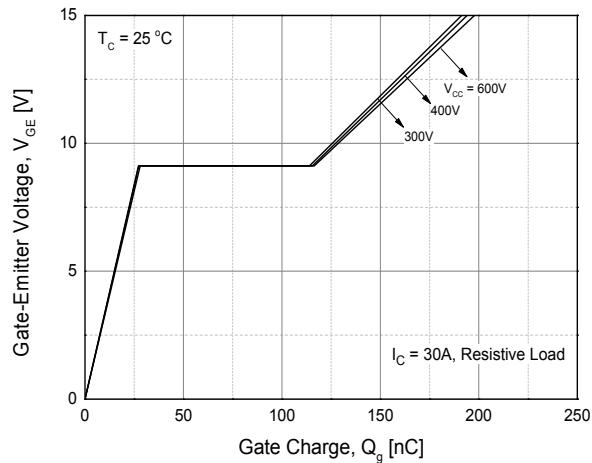


Fig. 14 SOA

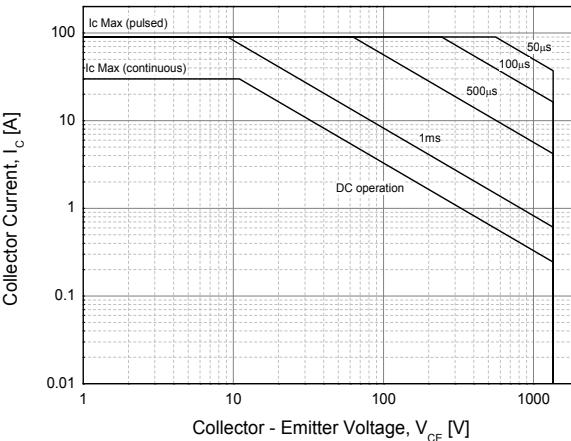


Fig. 15 RBSOA

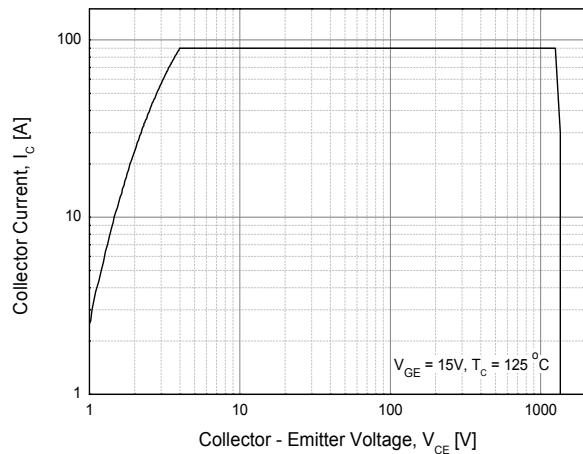


Fig. 16 Transient thermal impedance of IGBT


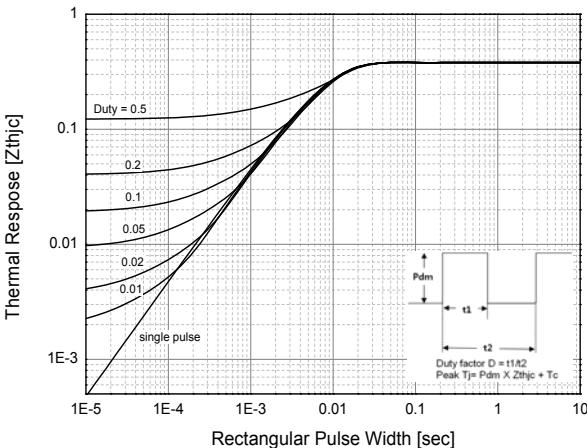


Fig. 17 Load Current vs. Frequency

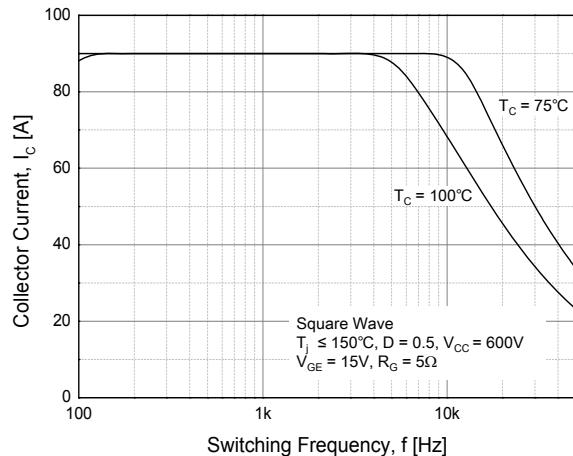

Diode Characteristics

Fig. 18 Conduction characteristics

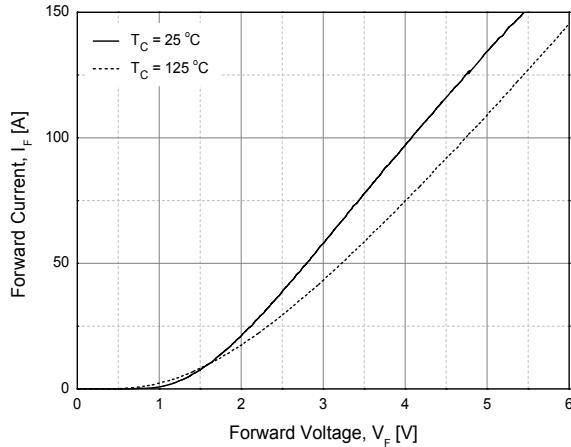


Fig. 19 Reverse recovery current vs. forward current

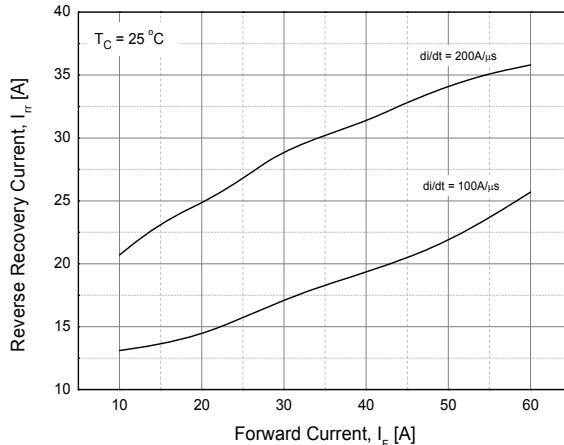


Fig. 20 Reverse recovery charge vs. forward current



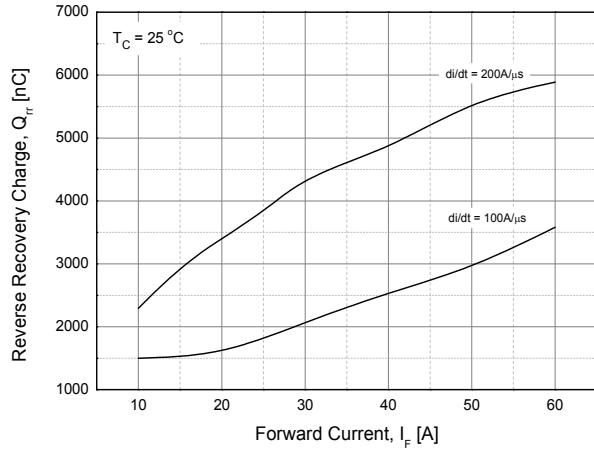


Fig. 21 Reverse recovery time vs. forward current

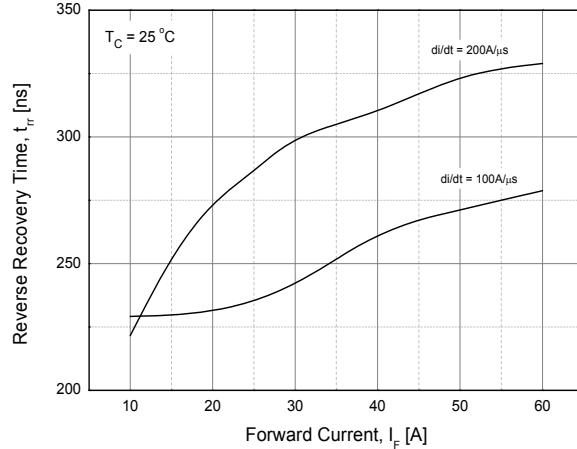

TO-3PN MECHANICAL DATA

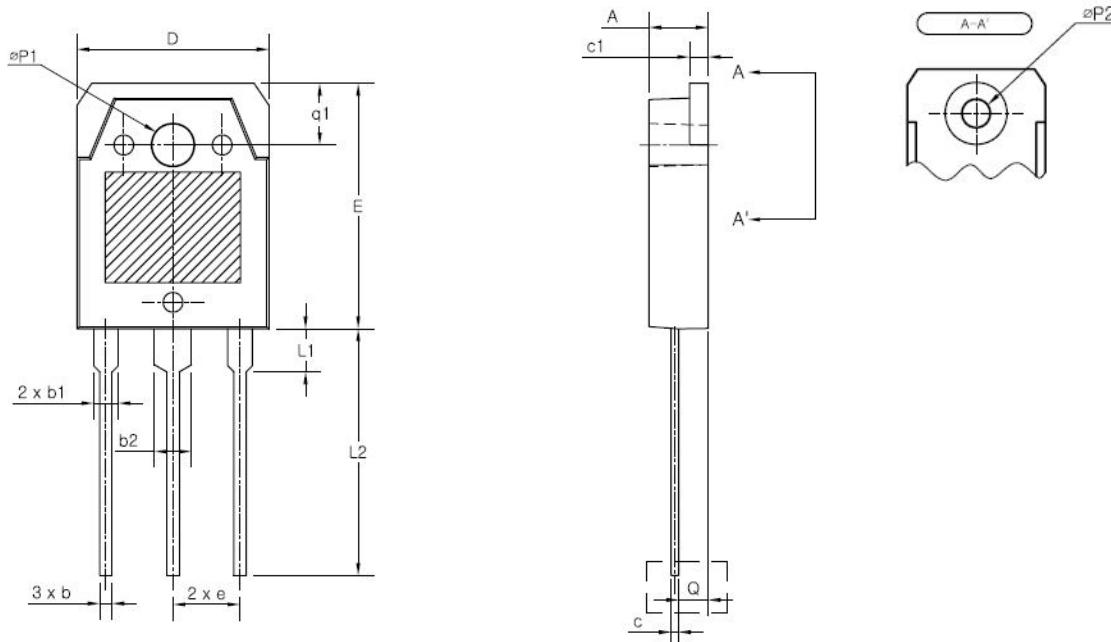

| SYMBOL | MIN | NOM | MAX |
|--------|--------|-------|-------|
| A | 4.60 | 4.80 | 5.00 |
| b | 0.80 | 1.00 | 1.20 |
| b1 | 1.80 | 2.00 | 2.20 |
| b2 | 2.80 | 3.00 | 3.20 |
| c | 0.55 | 0.60 | 0.75 |
| c1 | 1.45 | 1.50 | 1.65 |
| D | 15.40 | 15.60 | 15.80 |
| E | 19.70 | 19.90 | 20.10 |
| e | 5.15 | 5.45 | 5.75 |
| L1 | 3.30 | 3.50 | 3.70 |
| L2 | 19.80 | 20.00 | 20.20 |
| φP1 | 3.30 | 3.40 | 3.50 |
| φP2 | (3.20) | | |
| Q | 2.20 | 2.40 | 2.60 |
| q1 | 4.80 | 5.00 | 5.20 |

Notes**• RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented March, 2013. RoHS Declarations for this product can be obtained from the Product Documentation sections of www.gptechgroup.com.

• REACH Compliance

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact our office at GPTG Headquarters in Lake Forest, California to insure you get the most up-to-date REACH SVHC Declaration.

REACH banned substance information (REACH Article 67) is also available upon request.

- This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, or air traffic control.
- To obtain additional technical information or to place an order for this product, please contact us. The information in this datasheet is provided by Global Power Technologies Group. GPTG reserves the right to make changes, corrections, modifications, and improvements of datasheet without notice.

Global Power Technologies Group

20692 Prism Place
Lake Forest, CA 92630
TEL (949) 207-7500
FAX (949) 613-7600
E-mail: info@gptechgroup.com
Web site: www.gptechgroup.com

