

# MC14513B

## BCD-To-Seven Segment Latch/Decoder/Driver

### CMOS MSI

### (Low-Power Complementary MOS)

The MC14513B BCD-to-seven segment latch/decoder/driver is constructed with complementary MOS (CMOS) enhancement mode devices and NPN bipolar output drivers in a single monolithic structure. The circuit provides the functions of a 4-bit storage latch, an 8421 BCD-to-seven segment decoder, and has output drive capability. Lamp test (LT), blanking (BI), and latch enable (LE) inputs are used to test the display, to turn-off or pulse modulate the brightness of the display, and to store a BCD code, respectively. The Ripple Blanking Input (RBI) and Ripple Blanking Output (RBO) can be used to suppress either leading or trailing zeroes. It can be used with seven-segment light emitting diodes (LED), incandescent, fluorescent, gas discharge, or liquid crystal readouts either directly or indirectly.

Applications include instrument (e.g., counter, DVM, etc.) display driver, computer/calculator display driver, cockpit display driver, and various clock, watch, and timer uses.

#### Features

- Low Logic Circuit Power Dissipation
- High-Current Sourcing Outputs (Up to 25 mA)
- Latch Storage of Binary Input
- Blanking Input
- Lamp Test Provision
- Readout Blanking on all Illegal Input Combinations
- Lamp Intensity Modulation Capability
- Time Share (Multiplexing) Capability
- Adds Ripple Blanking In, Ripple Blanking Out to MC14511B
- Supply Voltage Range = 3.0 V to 18 V
- Capable of Driving Two Low-Power TTL Loads, One Low-Power Schottky TTL Load to Two HTL Loads Over the Rated Temperature Range
- These Devices are Pb-Free and are RoHS Compliant

#### MAXIMUM RATINGS (Voltages Referenced to $V_{SS}$ )

| Parameter  | Symbol      | Value                  | Unit |
|--|-------------|------------------------|------|
| DC Supply Voltage Range                                      | $V_{DD}$    | -0.5 to +18.0          | V    |
| Input Voltage Range, All Inputs                              | $V_{in}$    | -0.5 to $V_{DD} + 0.5$ | V    |
| DC Current Drain per Input Pin                               | I           | 10                     | mA   |
| Power Dissipation per Package (Note 1)                       | $P_D$       | 500                    | mW   |
| Operating Temperature Range                                  | $T_A$       | -55 to +125            | °C   |
| Storage Temperature Range                                    | $T_{stg}$   | -65 to +150            | °C   |
| Maximum Continuous Output Drive Current (Source) per Output  | $I_{OHmax}$ | 25                     | mA   |
| Maximum Continuous Output Power (Source) per Output (Note 2) | $P_{OHmax}$ | 50                     | mW   |


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Temperature Derating: Plastic "P and D/DW"  
Packages: - 7.0 mW/°C From 65°C To 125°C
2.  $P_{OHmax} = I_{OH} (V_{DD} - V_{OH})$




ON Semiconductor®

<http://onsemi.com>



PDIP-18  
P SUFFIX  
CASE 707

#### MARKING DIAGRAM



A = Assembly Location  
WL = Wafer Lot  
YY = Year  
WW = Work Week  
G = Pb-Free Package

#### ORDERING INFORMATION

| Device      | Package              | Shipping      |
|-------------|----------------------|---------------|
| MC14513BCPG | PDIP-18<br>(Pb-Free) | 20 Units/Rail |



This device contains protection circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid application of any voltage higher than maximum rated voltages to this high-impedance circuit. A destructive high current mode may occur if  $V_{in}$  and  $V_{out}$  are not constrained to the range  $V_{SS} \leq (V_{in} \text{ or } V_{out}) \leq V_{DD}$ .

Due to the sourcing capability of this circuit, damage can occur to the device if  $V_{DD}$  is applied, and the outputs are shorted to  $V_{SS}$  and are at a logical 1 (See Maximum Ratings).


Unused inputs must always be tied to an appropriate logic voltage level (e.g., either  $V_{SS}$  or  $V_{DD}$ ).

# MC14513B

## PIN ASSIGNMENT

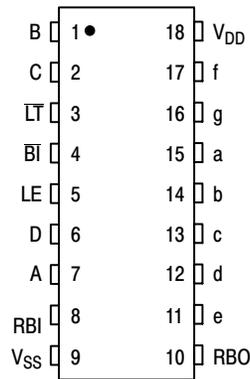

## DISPLAY



## TRUTH TABLE

| Inputs |    |    |    |   |   |   |   | Outputs |   |   |   |   |   |   |   |         |
|--------|----|----|----|---|---|---|---|---------|---|---|---|---|---|---|---|---------|
| RBI    | LE | BI | LT | D | C | B | A | RBO     | a | b | c | d | e | f | g | Display |
| X      | X  | X  | 0  | X | X | X | X | +       | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 8       |
| X      | X  | 0  | 1  | X | X | X | X | +       | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank   |
| 1      | 0  | 1  | 1  | 0 | 0 | 0 | 0 | 1       | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank   |
| 0      | 0  | 1  | 1  | 0 | 0 | 0 | 0 | 0       | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0       |
| X      | 0  | 1  | 1  | 0 | 0 | 0 | 1 | 0       | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 1       |
| X      | 0  | 1  | 1  | 0 | 0 | 1 | 0 | 0       | 1 | 1 | 0 | 1 | 1 | 0 | 1 | 2       |
| X      | 0  | 1  | 1  | 0 | 0 | 1 | 1 | 0       | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 3       |
| X      | 0  | 1  | 1  | 0 | 1 | 0 | 0 | 0       | 0 | 0 | 1 | 1 | 0 | 0 | 1 | 4       |
| X      | 0  | 1  | 1  | 0 | 1 | 0 | 1 | 0       | 1 | 0 | 1 | 1 | 0 | 1 | 1 | 5       |
| X      | 0  | 1  | 1  | 0 | 1 | 1 | 0 | 0       | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 6       |
| X      | 0  | 1  | 1  | 0 | 1 | 1 | 1 | 0       | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 7       |
| X      | 0  | 1  | 1  | 1 | 0 | 0 | 0 | 0       | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 8       |
| X      | 0  | 1  | 1  | 1 | 0 | 0 | 1 | 0       | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 9       |
| X      | 0  | 1  | 1  | 1 | 0 | 1 | 0 | 0       | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank   |
| X      | 0  | 1  | 1  | 1 | 0 | 1 | 1 | 0       | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank   |
| X      | 0  | 1  | 1  | 1 | 1 | 0 | 0 | 0       | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank   |
| X      | 0  | 1  | 1  | 1 | 1 | 1 | 0 | 0       | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank   |
| X      | 0  | 1  | 1  | 1 | 1 | 1 | 1 | 0       | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Blank   |
| X      | 1  | 1  | 1  | X | X | X | X | †       |   |   |   |   | * |   |   | *       |

X = Don't Care

†RBO = RBI ( $\overline{D} \overline{C} \overline{B} \overline{A}$ ), indicated by other rows of table

\*Depends upon the BCD code previously applied when LE = 0

# MC14513B

## ELECTRICAL CHARACTERISTICS (Voltages Referenced to $V_{SS}$ )

| Characteristic  | Symbol   | $V_{DD}$<br>Vdc | - 55°C |      | 25°C  |                 |      | 125°C |      | Unit |
|---|----------|-----------------|--------|------|-------|-----------------|------|-------|------|------|
|   |          |                 | Min    | Max  | Min   | Typ<br>(Note 3) | Max  | Min   | Max  |      |
| Output Voltage — Segment Outputs<br>“0” Level<br>$V_{in} = V_{DD}$ or 0<br><br>“1” Level<br>$V_{in} = 0$ or $V_{DD}$  | $V_{OL}$ | 5.0             | –      | 0.05 | –     | 0               | 0.05 | –     | 0.05 | Vdc  |
|   |          | 10              | –      | 0.05 | –     | 0               | 0.05 | –     | 0.05 |      |
|   |          | 15              | –      | 0.05 | –     | 0               | 0.05 | –     | 0.05 |      |
|   | $V_{OH}$ | 5.0             | 4.1    | –    | 4.1   | 5.0             | –    | 4.1   | –    | Vdc  |
|   |          | 10              | 9.1    | –    | 9.1   | 10              | –    | 9.1   | –    |      |
|   |          | 15              | 14.1   | –    | 14.1  | 15              | –    | 14.1  | –    |      |
| Output Voltage — RBO Output<br>“0” Level<br>$V_{in} = V_{DD}$ or 0<br><br>“1” Level<br>$V_{in} = 0$ or $V_{DD}$   | $V_{OL}$ | 5.0             | –      | 0.05 | –     | 0               | 0.05 | –     | 0.05 | Vdc  |
|   |          | 10              | –      | 0.05 | –     | 0               | 0.05 | –     | 0.05 |      |
|   |          | 15              | –      | 0.05 | –     | 0               | 0.05 | –     | 0.05 |      |
|   | $V_{OH}$ | 5.0             | 4.95   | –    | 4.95  | 5.0             | –    | 4.95  | –    | Vdc  |
|   |          | 10              | 9.95   | –    | 9.95  | 10              | –    | 9.95  | –    |      |
|   |          | 15              | 14.95  | –    | 14.95 | 15              | –    | 14.95 | –    |      |
| Input Voltage (Note 3) “0” Level<br>( $V_O = 3.8$ or $0.5$ Vdc)<br>( $V_O = 8.8$ or $1.0$ Vdc)<br>( $V_O = 13.8$ or $1.5$ Vdc)<br><br>“1” Level<br>( $V_O = 0.5$ or $3.8$ Vdc)<br>( $V_O = 1.0$ or $8.8$ Vdc)<br>( $V_O = 1.5$ or $13.8$ Vdc)   | $V_{IL}$ | 5.0             | –      | 1.5  | –     | 2.25            | 1.5  | –     | 1.5  | Vdc  |
|   |          | 10              | –      | 3.0  | –     | 4.50            | 3.0  | –     | 3.0  |      |
|   |          | 15              | –      | 4.0  | –     | 6.75            | 4.0  | –     | 4.0  |      |
|   | $V_{IH}$ | 5.0             | 3.5    | –    | 3.5   | 2.75            | –    | 3.5   | –    | Vdc  |
|   |          | 10              | 7.0    | –    | 7.0   | 5.50            | –    | 7.0   | –    |      |
|   |          | 15              | 11     | –    | 11    | 8.25            | –    | 11    | –    |      |
| Output Drive Voltage — Segments<br>Source<br>( $I_{OH} = 0$ mA)<br>( $I_{OH} = 5.0$ mA)<br>( $I_{OH} = 10$ mA)<br>( $I_{OH} = 15$ mA)<br>( $I_{OH} = 20$ mA)<br>( $I_{OH} = 25$ mA)<br><br>( $I_{OH} = 0$ mA)<br>( $I_{OH} = 5.0$ mA)<br>( $I_{OH} = 10$ mA)<br>( $I_{OH} = 15$ mA)<br>( $I_{OH} = 20$ mA)<br>( $I_{OH} = 25$ mA)<br><br>( $I_{OH} = 0$ mA)<br>( $I_{OH} = 5.0$ mA)<br>( $I_{OH} = 10$ mA)<br>( $I_{OH} = 15$ mA)<br>( $I_{OH} = 20$ mA)<br>( $I_{OH} = 25$ mA) | $V_{OH}$ | 5.0             | 4.1    | –    | 4.1   | 4.57            | –    | 4.1   | –    | Vdc  |
|   |          |                 | –      | –    | –     | 4.24            | –    | –     | –    |      |
|   |          |                 | 3.9    | –    | 3.9   | 4.12            | –    | 3.5   | –    |      |
|   |          |                 | –      | –    | –     | 3.94            | –    | –     | –    |      |
|   |          |                 | 3.4    | –    | 3.4   | 3.70            | –    | 3.0   | –    |      |
|   |          |                 | –      | –    | –     | 3.54            | –    | –     | –    |      |
|   | 10       | 9.1             | –      | –    | 9.1   | 9.58            | –    | 9.1   | –    | Vdc  |
|   |          |                 | –      | –    | –     | 9.26            | –    | –     | –    |      |
|   |          |                 | 9.0    | –    | 9.0   | 9.17            | –    | 8.6   | –    |      |
|   |          |                 | –      | –    | –     | 9.04            | –    | –     | –    |      |
|   |          |                 | 8.6    | –    | 8.6   | 8.90            | –    | 8.2   | –    |      |
|   |          |                 | –      | –    | –     | 8.75            | –    | –     | –    |      |
|   | 15       | 14.1            | –      | –    | 14.1  | 14.59           | –    | 14.1  | –    | Vdc  |
|   |          |                 | –      | –    | –     | 14.27           | –    | –     | –    |      |
|   |          |                 | 14     | –    | 14    | 14.18           | –    | 13.6  | –    |      |
|   |          |                 | –      | –    | –     | 14.07           | –    | –     | –    |      |
|   |          |                 | 13.6   | –    | 13.6  | 13.95           | –    | 13.2  | –    |      |
|   |          |                 | –      | –    | –     | 13.80           | –    | –     | –    |      |

3. Noise immunity specified for worst-case input combination.  
 Noise Margin for both “1” and “0” level = 1.0 Vdc min @  $V_{DD} = 5.0$  Vdc  
 2.0 Vdc min @  $V_{DD} = 10$  Vdc  
 2.5 Vdc min @  $V_{DD} = 15$  Vdc

# MC14513B

## ELECTRICAL CHARACTERISTICS (continued) (Voltages Referenced to V<sub>SS</sub>)

| Characteristic   | Symbol          | V <sub>DD</sub><br>Vdc | - 55°C  |      | 25°C  |                 |      | 125°C |      | Unit |
|--|-----------------|------------------------|---|------|-------|-----------------|------|-------|------|------|
|  |                 |                        | Min   | Max  | Min   | Typ<br>(Note 4) | Max  | Min   | Max  |      |
| Output Drive Current — RBO Output<br>(V <sub>OH</sub> = 2.5 V)<br>Source<br>(V <sub>OH</sub> = 9.5 V)<br>(V <sub>OH</sub> = 13.5 V)<br>Sink<br>(V <sub>OL</sub> = 0.4 V)<br>(V <sub>OL</sub> = 0.5 V)<br>(V <sub>OL</sub> = 1.5 V) | I <sub>OH</sub> | 5.0                    | -0.40   | -    | -0.32 | -0.64           | -    | -0.22 | -    | mAdc |
|  |                 | 10                     | -0.21   | -    | -0.17 | -0.34           | -    | -0.12 | -    |      |
|  |                 | 15                     | -0.81   | -    | -0.66 | -1.30           | -    | -0.46 | -    |      |
|  | I <sub>OL</sub> | 5.0                    | 0.18  | -    | 0.15  | 0.29            | -    | 0.10  | -    | mAdc |
|  |                 | 10                     | 0.47  | -    | 0.38  | 0.75            | -    | 0.26  | -    |      |
|  |                 | 15                     | 1.80  | -    | 1.50  | 2.90            | -    | 1.0   | -    |      |
| Output Drive Current — Segments<br>(V <sub>OL</sub> = 0.4 V)<br>Sink<br>(V <sub>OL</sub> = 0.5 V)<br>(V <sub>OL</sub> = 1.5 V)   | I <sub>OL</sub> | 5.0                    | 0.64  | -    | 0.51  | 0.88            | -    | 0.36  | -    | mAdc |
|  |                 | 10                     | 1.6   | -    | 1.3   | 2.25            | -    | 0.9   | -    |      |
|  |                 | 15                     | 4.2   | -    | 3.4   | 8.8             | -    | 2.4   | -    |      |
| Input Current  | I <sub>in</sub> | 15                     | -   | ±0.1 | -     | ±0.00001        | ±0.1 | -     | ±1.0 | μAdc |
| Input Capacitance  | C <sub>in</sub> | -                      | -   | -    | -     | 5.0             | 7.5  | -     | -    | pF   |
| Quiescent Current<br>(Per Package) V <sub>in</sub> = 0 or V <sub>DD</sub> ,<br>I <sub>out</sub> = 0 μA   | I <sub>DD</sub> | 5.0                    | -   | 5.0  | -     | 0.005           | 5.0  | -     | 150  | μAdc |
|  |                 | 10                     | -   | 10   | -     | 0.010           | 10   | -     | 300  |      |
|  |                 | 15                     | -   | 20   | -     | 0.015           | 20   | -     | 600  |      |
| Total Supply Current (Note 5, 6)<br>(Dynamic plus Quiescent,<br>Per Package)<br>(C <sub>L</sub> = 50 pF on all outputs, all<br>buffers switching)  | I <sub>T</sub>  | 5.0                    | I <sub>T</sub> = (1.9 μA/kHz) f + I <sub>DD</sub> |      |       |                 |      |       | μAdc |      |
|  |                 | 10                     | I <sub>T</sub> = (3.8 μA/kHz) f + I <sub>DD</sub> |      |       |                 |      |       |      |      |
|  |                 | 15                     | I <sub>T</sub> = (5.7 μA/kHz) f + I <sub>DD</sub> |      |       |                 |      |       |      |      |

4. Noise immunity specified for worst-case input combination.

Noise Margin for both "1" and "0" level = 1.0 Vdc min @ V<sub>DD</sub> = 5.0 Vdc  
 2.0 Vdc min @ V<sub>DD</sub> = 10 Vdc  
 2.5 Vdc min @ V<sub>DD</sub> = 15 Vdc

5. The formulas given are for the typical characteristics only at 25°C.

6. To calculate total supply current at loads other than 50 pF: I<sub>T</sub>(C<sub>L</sub>) = I<sub>T</sub>(50 pF) + 3.5 × 10<sup>-3</sup> (C<sub>L</sub> - 50) V<sub>DD</sub>f where: I<sub>T</sub> is in μA (per package), C<sub>L</sub> in pF, V<sub>DD</sub> in Vdc, and f in kHz is input frequency.

Input LE and RBI low, and Inputs D,  $\overline{B}$ I and  $\overline{L}$ T high.  
 f in respect to a system clock.

All outputs connected to respective C<sub>L</sub> loads.

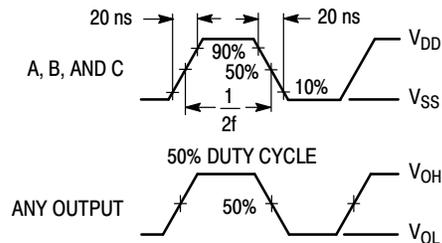


Figure 1. Dynamic Power Dissipation Signal Waveforms

# MC14513B

## SWITCHING CHARACTERISTICS (Note 7) ( $C_L = 50 \text{ pF}$ , $T_A = 25^\circ\text{C}$ )

| Characteristic   | Symbol       | $V_{DD}$<br>Vdc | All Types         |                   |                    | Unit |
|--|--------------|-----------------|-------------------|-------------------|--------------------|------|
|  |              |                 | Min               | Typ               | Max                |      |
| Output Rise Time — Segment Outputs   | $t_{TLH}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 40<br>30<br>25    | 80<br>60<br>50     | ns   |
| Output Rise Time — RBO Output  | $t_{TLH}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 480<br>240<br>190 | 960<br>480<br>380  | ns   |
| Output Fall Time — Segment Outputs (Note 7)<br>$t_{THL} = (1.5 \text{ ns/pF}) C_L + 50 \text{ ns}$<br>$t_{THL} = (0.75 \text{ ns/pF}) C_L + 37.5 \text{ ns}$<br>$t_{THL} = (0.55 \text{ ns/pF}) C_L + 37.5 \text{ ns}$   | $t_{THL}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 125<br>75<br>65   | 250<br>150<br>130  | ns   |
| Output Fall Time — RBO Outputs<br>$t_{THL} = (3.25 \text{ ns/pF}) C_L + 107.5 \text{ ns}$<br>$t_{THL} = (1.35 \text{ ns/pF}) C_L + 67.5 \text{ ns}$<br>$t_{THL} = (0.95 \text{ ns/pF}) C_L + 62.5 \text{ ns}$  | $t_{THL}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 270<br>135<br>110 | 540<br>270<br>220  | ns   |
| Propagation Delay Time — A, B, C, D Inputs (Note 7)<br>$t_{PLH} = (0.40 \text{ ns/pF}) C_L + 620 \text{ ns}$<br>$t_{PLH} = (0.25 \text{ ns/pF}) C_L + 237.5 \text{ ns}$<br>$t_{PLH} = (0.20 \text{ ns/pF}) C_L + 165 \text{ ns}$<br>$t_{PHL} = (1.3 \text{ ns/pF}) C_L + 655 \text{ ns}$<br>$t_{PHL} = (0.60 \text{ ns/pF}) C_L + 260 \text{ ns}$<br>$t_{PHL} = (0.35 \text{ ns/pF}) C_L + 182.5 \text{ ns}$                     | $t_{PLH}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 640<br>250<br>175 | 1280<br>500<br>350 | ns   |
|  | $t_{PHL}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 720<br>290<br>200 | 1440<br>580<br>400 | ns   |
| Propagation Delay Time — RBI and $\overline{BI}$ Inputs (Note 7)<br>$t_{PLH} = (1.05 \text{ ns/pF}) C_L + 547.5 \text{ ns}$<br>$t_{PLH} = (0.45 \text{ ns/pF}) C_L + 177.5 \text{ ns}$<br>$t_{PLH} = (0.30 \text{ ns/pF}) C_L + 135 \text{ ns}$<br>$t_{PHL} = (0.85 \text{ ns/pF}) C_L + 442.5 \text{ ns}$<br>$t_{PHL} = (0.45 \text{ ns/pF}) C_L + 177.5 \text{ ns}$<br>$t_{PHL} = (0.35 \text{ ns/pF}) C_L + 142.5 \text{ ns}$ | $t_{PLH}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 600<br>200<br>150 | 750<br>300<br>220  | ns   |
|  | $t_{PHL}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 485<br>200<br>160 | 970<br>400<br>320  | ns   |
| Propagation Delay Time — $\overline{LT}$ Input (Note 7)<br>$t_{PLH} = (0.45 \text{ ns/pF}) C_L + 290.5 \text{ ns}$<br>$t_{PLH} = (0.25 \text{ ns/pF}) C_L + 112.5 \text{ ns}$<br>$t_{PLH} = (0.20 \text{ ns/pF}) C_L + 80 \text{ ns}$<br>$t_{PHL} = (1.3 \text{ ns/pF}) C_L + 248 \text{ ns}$<br>$t_{PHL} = (0.45 \text{ ns/pF}) C_L + 102.5 \text{ ns}$<br>$t_{PHL} = (0.35 \text{ ns/pF}) C_L + 72.5 \text{ ns}$               | $t_{PLH}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 313<br>125<br>90  | 625<br>250<br>180  | ns   |
|  | $t_{PHL}$    | 5.0<br>10<br>15 | —<br>—<br>—       | 313<br>125<br>90  | 625<br>250<br>180  | ns   |
| Setup Time   | $t_{su}$     | 5.0<br>10<br>15 | 100<br>40<br>30   | —<br>—<br>—       | —<br>—<br>—        | ns   |
| Hold Time  | $t_h$        | 5.0<br>10<br>15 | 60<br>40<br>30    | —<br>—<br>—       | —<br>—<br>—        | ns   |
| Latch Enable Pulse Width   | $t_{WL(LE)}$ | 5.0<br>10<br>15 | 520<br>220<br>130 | 260<br>110<br>65  | —<br>—<br>—        | ns   |



7. The formulas given are for the typical characteristics only.




# MC14513B

## CONNECTIONS TO VARIOUS DISPLAY READOUTS


### LIGHT EMITTING DIODE (LED) READOUT

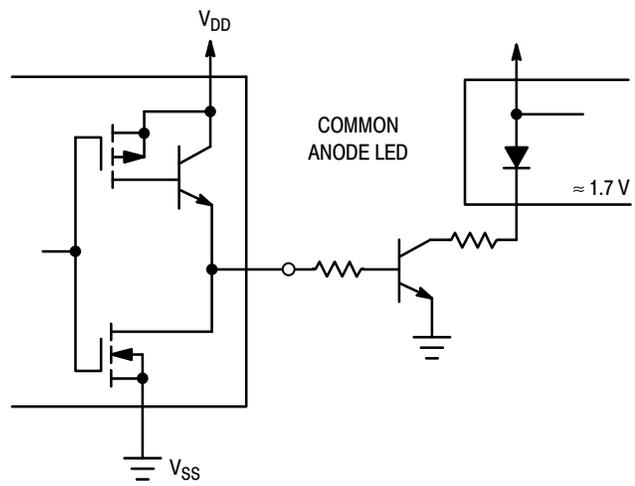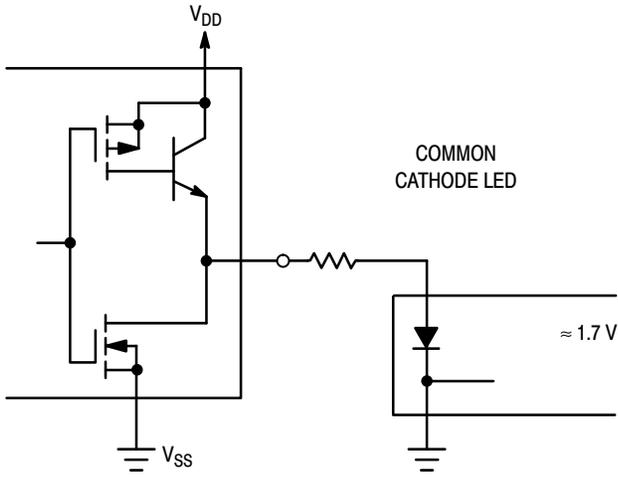


### INCANDESCENT READOUT

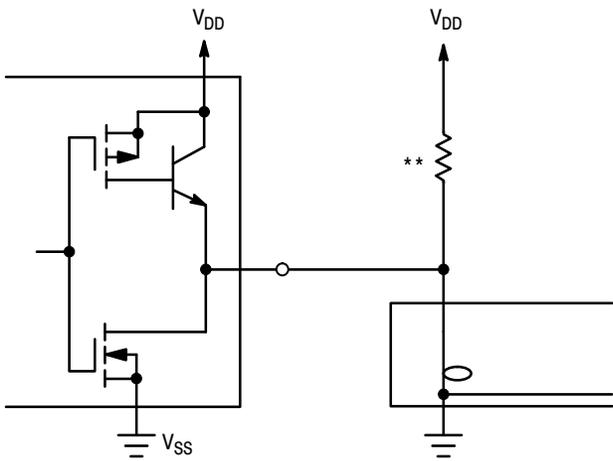


### FLUORESCENT READOUT

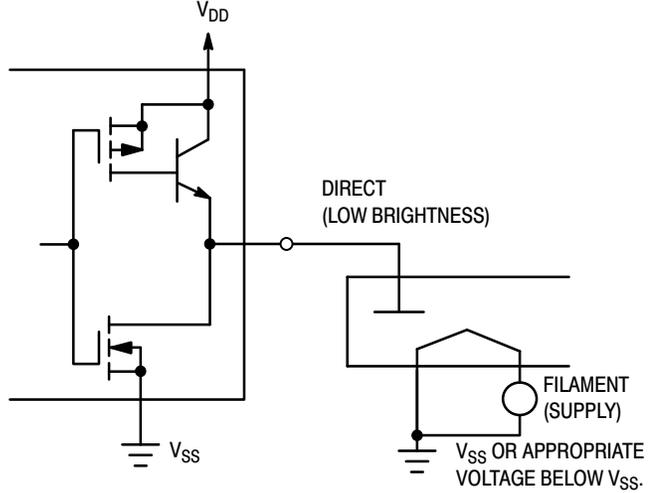

### GAS DISCHARGE READOUT

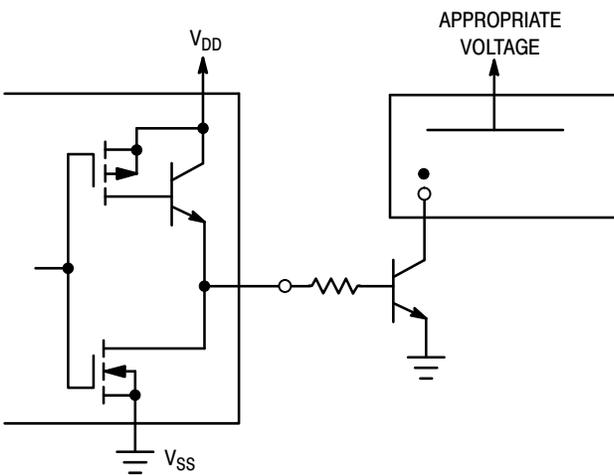

### LIQUID CRYSTAL (LC) READOUT

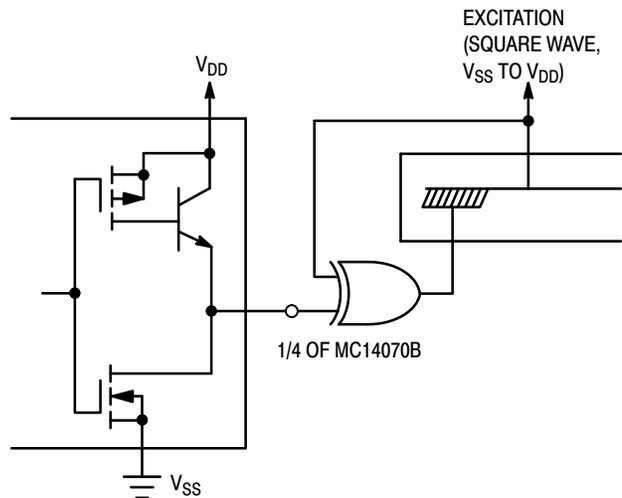


\*\* A filament pre-warm resistor is recommended to reduce filament thermal shock and increase the effective cold resistance of the filament.

Direct dc drive of LC's not recommended for life of LC readouts.

# MC14513B


## LOGIC DIAGRAM

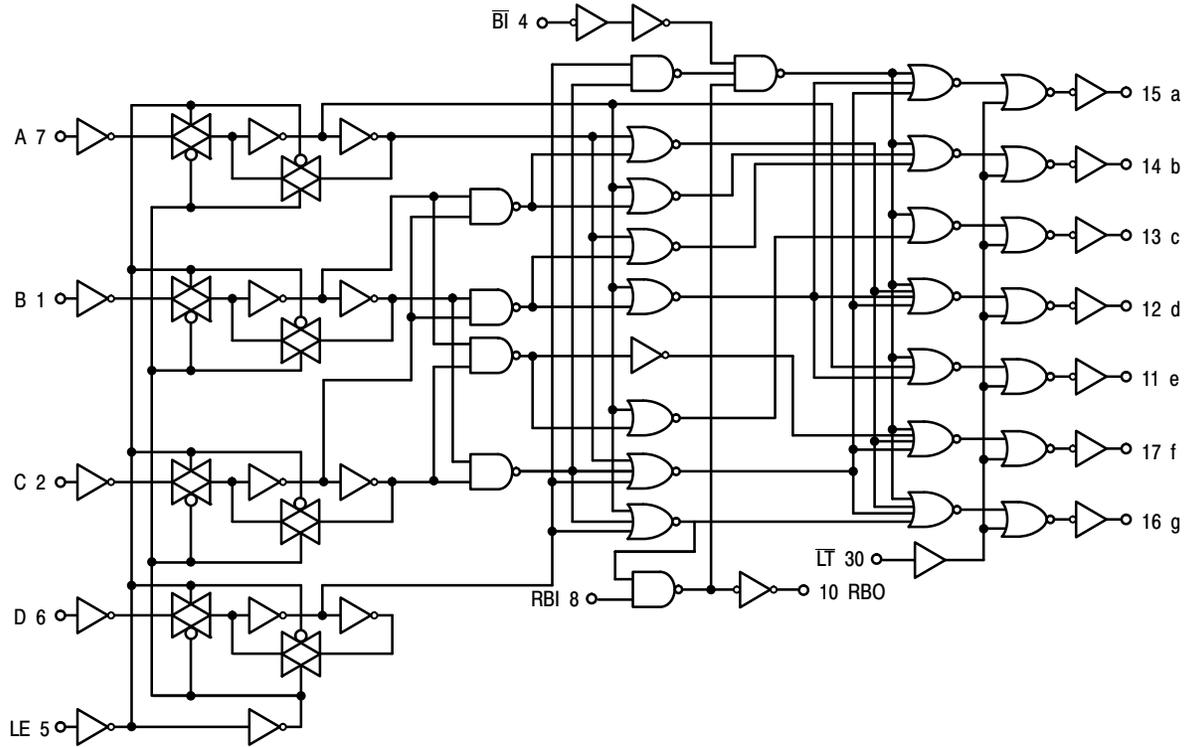


# MC14513B

## TYPICAL APPLICATIONS FOR RIPPLE BLANKING

### LEADING EDGE ZERO SUPPRESSION

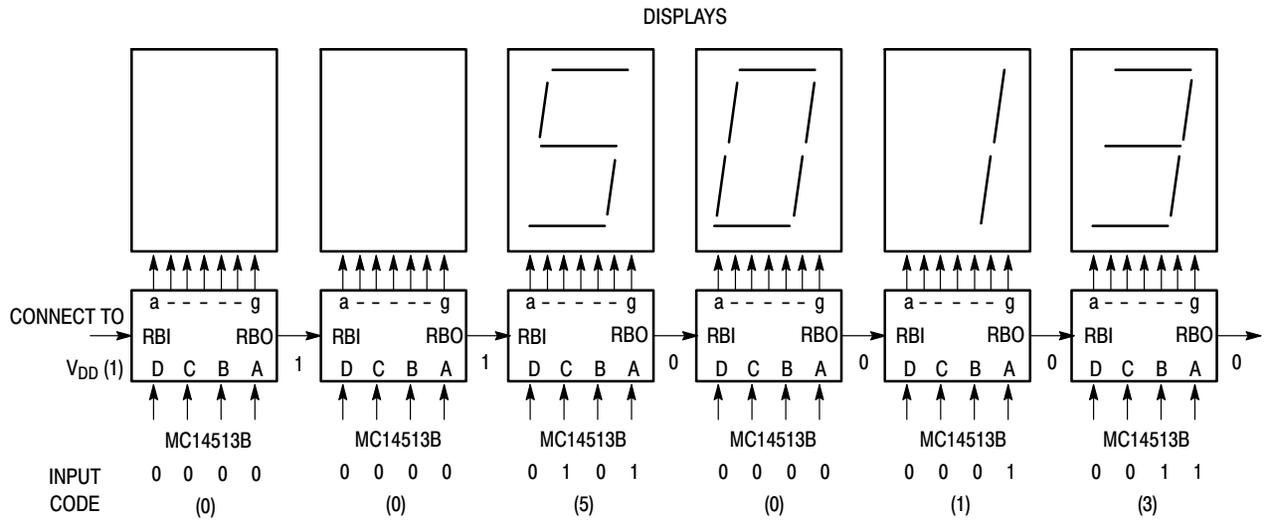


### TRAILING EDGE ZERO SUPPRESSION

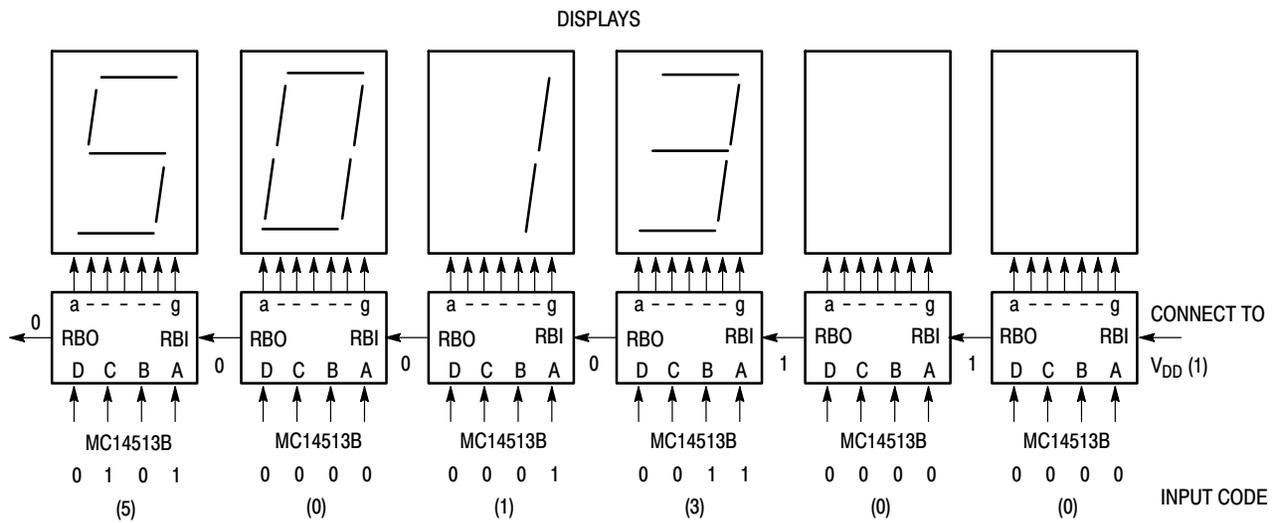

# MC14513B

## PACKAGE DIMENSIONS

PDIP-18  
CASE 707-02  
ISSUE D

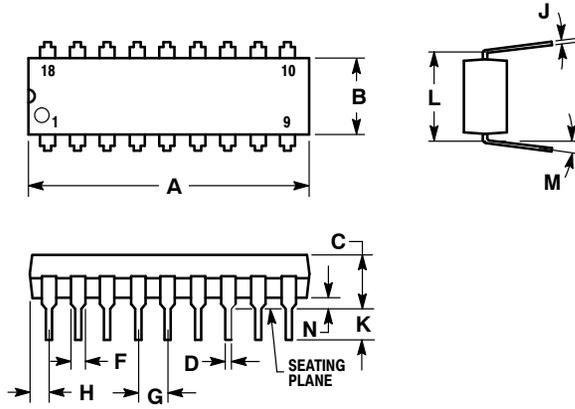

NOTES:

1. POSITIONAL TOLERANCE OF LEADS (D), SHALL BE WITHIN 0.25 mm (0.010) AT MAXIMUM MATERIAL CONDITION, IN RELATION TO SEATING PLANE AND EACH OTHER.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
4. CONTROLLING DIMENSION: INCH.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.875     | 0.915 | 22.22       | 23.24 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.140     | 0.180 | 3.56        | 4.57  |
| D   | 0.014     | 0.022 | 0.36        | 0.56  |
| F   | 0.050     | 0.070 | 1.27        | 1.78  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.040     | 0.060 | 1.02        | 1.52  |
| J   | 0.008     | 0.012 | 0.20        | 0.30  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.300 BSC |       | 7.62 BSC    |       |
| M   | 0° 15°    |       | 0° 15°      |       |
| N   | 0.020     | 0.040 | 0.51        | 1.02  |

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5773-3850

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local Sales Representative